

# A Quilter's Eye Installation Manual

## Included in the box:


- Installation Manual
- Camera with mounting bracket
- Wire clips (10)
- 7" LCD screen
- LCD mounting bracket
- Power supply
- Remote
- Alcohol wipe
- One dual lock strip

**\* Note\* All pictures in this manual are for illustration purposes only. Machines will vary, but the layout of installation is the same**




## Assemble The Base

- Remove the thumb screw on the left hand side.
- Separate the 2 half's and insert the swivel arm.

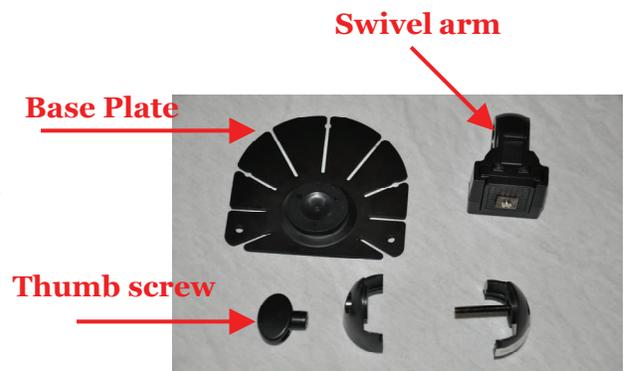

## Install quick release to LCD

- The swivel arm had square clip that can be removed form the base by pressing lever.
- Lay the monitor face down and slide the square washer on the clip into the metal rail on the back of the monitor.

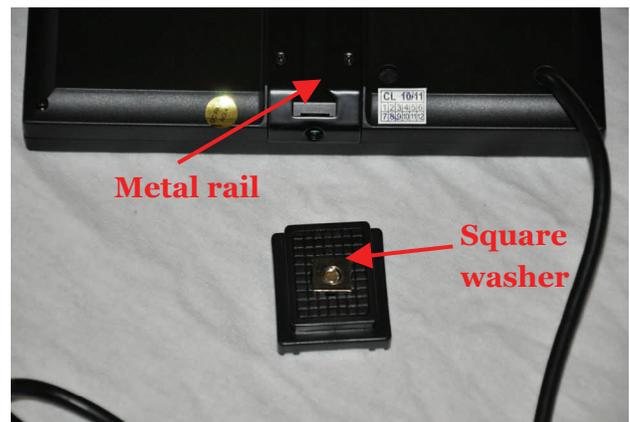

## Installing the Base



- Before removing the “sticky back” of the monitor base, place the base on your machine in the desired spot and make any adjustments. You can cut or bend any extra base “fingers” depending on your model of machine and where you want the base installed.
- Clean the area with the enclosed alcohol pad to remove dust and allow to dry



- Peel off the paper back and press the base firmly to your machine.

## Installing the LCD and Cables

- Slide the LCD onto the base.
- Test fit the cable along the left side of your machine, make sure not to interfere with any moving parts.
- Now you know where you want the cable. Place the provided wire clips along the wire spacing them as needed.
- Clean the area where you will install wire clips with the alcohol wipes.
- The cable routing should look as follows.

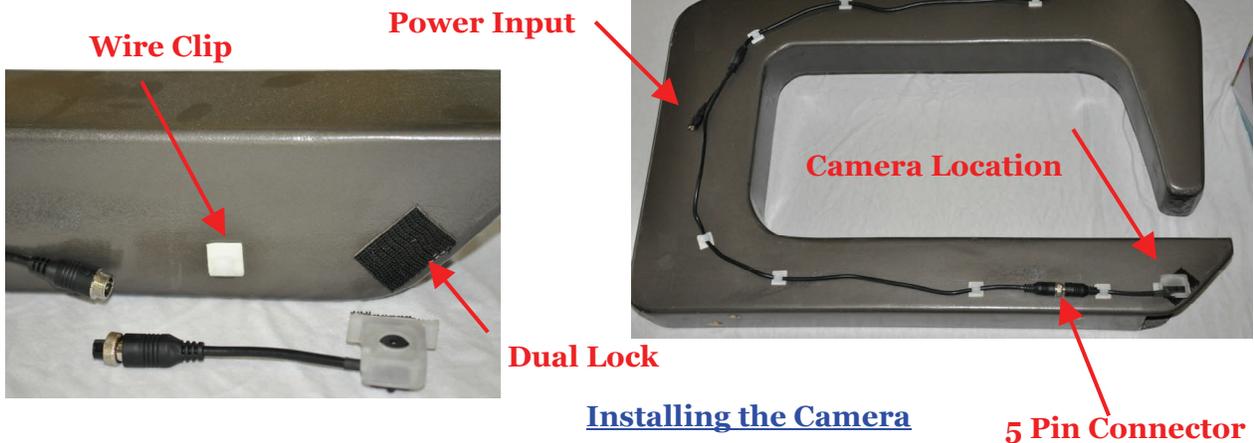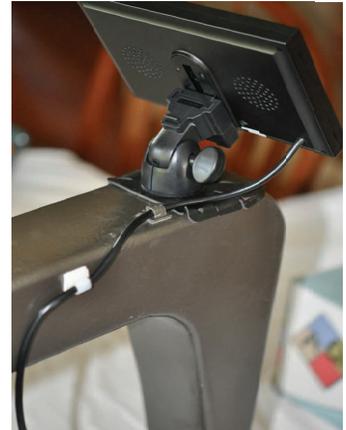

- Clean the left side of the machine with alcohol wipe and let dry.
- Apply 2” strip of Dual Lock to clean area. For best results, apply at a 45 degree angel centered on the needle.
- Press camera onto Dual Lock strip and install a wire clip near 5 pin connector.

## Make the Connections

- Aligning the arrows on the 5 pin connector, push together and screw the barrel together.
- Plug the power supply into the power input near the back of the machine.
- Plug the power supply into the wall.



## How It All Works



**LED Adjustment Power Un-used Down Menu Up Image Rotation 4:3/16:9**

<b>LED Adjustment</b>	To adjust the brightness of the LEDs, rotate this knob.
<b>Power</b>	Turns on and off both camera and monitor
<b>Un-used</b>	This button is not a working button
<b>Down</b>	Used to navigate in the menu system
<b>Menu</b>	Pulls up the on screen menu system
<b>Up</b>	Used to navigate in the menu system
<b>Image Rotation</b>	Allows you to rotate and mirror the image from the camera
<b>4:3/ 16:9</b>	Changes the aspect ratio between full screen and letter box

\* For most up to date information and support, visit the website at [www.AQuiltersEye.com](http://www.AQuiltersEye.com)

\*Due to constant effort to improve products and product features, specifications may change without notice.