

PEANUTS®


Manufactured under license by Northcott Silk USA Inc.

GOOD GRIEF!





FREE PATTERN

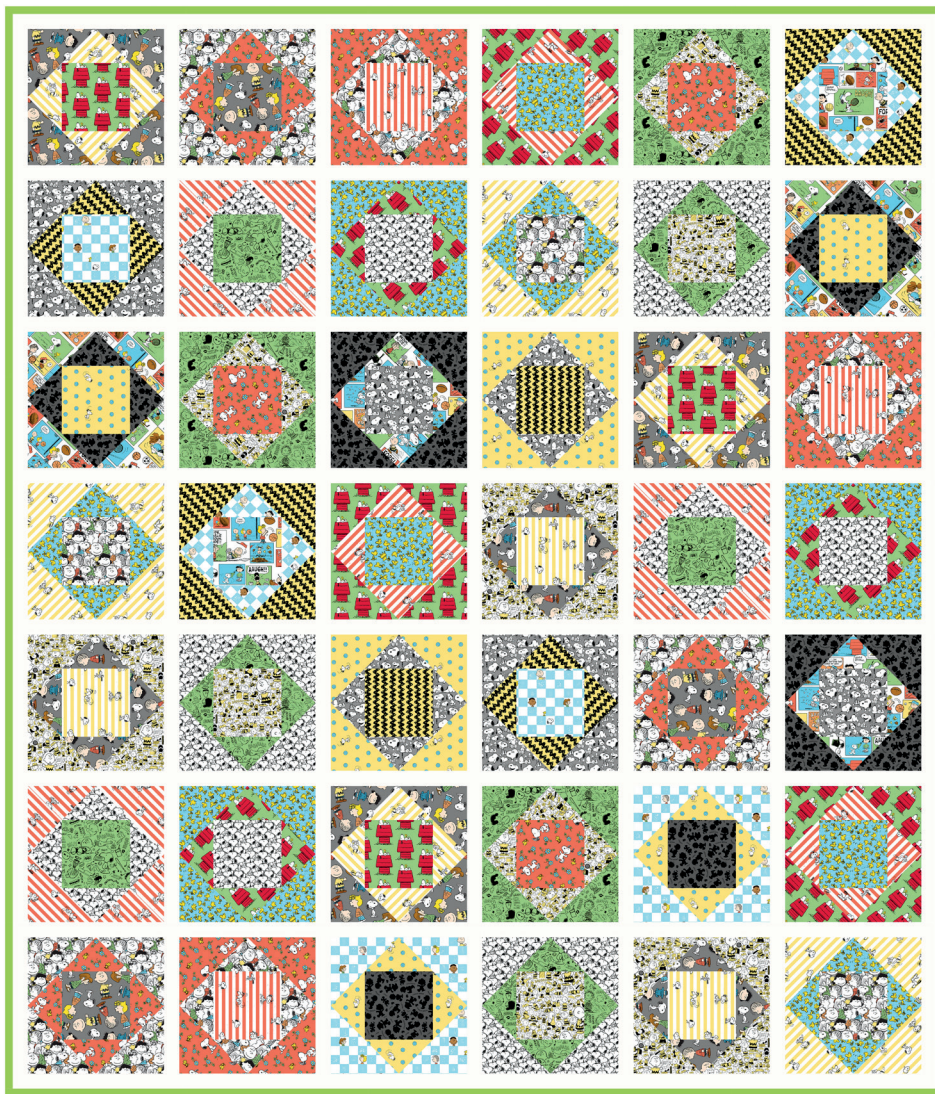FINISHED SIZE - 61" X 71"
BY NORTHCOTT STUDIO

COLLECTION: PEANUTS PRECUTS
SKILL LEVEL: CONFIDENT BEGINNER




REQUIREMENTS & QUILT ASSEMBLY INSTRUCTIONS

Fabric		Yardage
TPEANUTS42-10		1 Tile Pack (42 - 10" squares)
CPEANUTS42-10		3 Chip Packs (126 - 5" squares)
Sashing Fabric 9000-10		1 1/8 yds
Binding Fabric 9000-711		1/2 yd
9000-711 Crosswise Backing		4 yds


Piecing Instructions:

1. Lay out 42 pairs of (same) 5" chips for the first round of 'square in a square'. The remaining 42 chips will be used for the block centers.


2. Cut each of the 42 pairs of chips once on the diagonal to yield 42 sets of four triangles. Match each set of triangles with a contrasting chip for the center square.



3. Sew the long edge of a triangle on opposite sides of the center square. Press seams away from the center. Sew the remaining two triangles on the remaining sides and press seams away from the center. Trim to 6 3/4" x 6 3/4".



4. Cut each of the 10" tiles twice on the diagonal to yield four triangles. Match each set of triangles with a contrasting square-in-a-square unit.



5. Sew the long edge of a triangle on opposite sides of the square-in-a-square unit and press seams away from the center. Sew the remaining two triangles on the remaining sides and press seams away from the center. Trim block to 9 1/4" x 9 1/4".




6. Repeat Steps 3 to 5 for the remaining 41 sets of chips and tiles.

QUILT ASSEMBLY INSTRUCTIONS

Completing the Quilt Top:

1. From the Sashing fabric, cut 9 - 1 ½" x WOF strips. Sub-cut these strips into 35 - 8 ¾" vertical sashing strips.

2. Arrange blocks in seven rows of six blocks each. Sew blocks together, adding a sashing strip between each block.

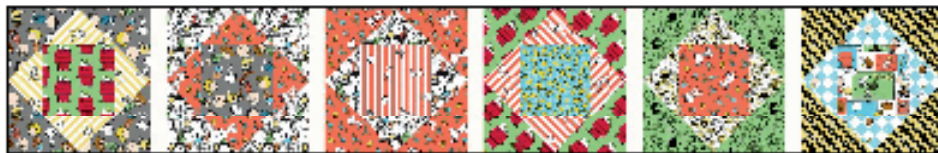

3. From the Sashing fabric, cut 12 - 1 ½" x WOF strips. Join strips together end to end and then cut 8 - 58" horizontal sashing strips and 2 - 69 ¾" vertical strips.

4. Sew rows together, adding a horizontal sashing strip between each row, then add a sashing strip to the top and bottom edges. Sew a 69 ¾" vertical strip to each side edge to complete the quilt top.

5. From the Binding fabric, cut 7 - 2 ½" x WOF strips. Join strips together using diagonal seams. Fold in half, wrong sides together, along the length of the strip and press.

6. Cut backing fabric in half to yield 2 - 2 yd x WOF pieces. Join the two pieces together along the selvage edges.

7. Layer quilt top with batting and backing. Quilt as desired. Bind using your favorite method.