

## Station 1: Prep Station

On main fabric, mark  $\frac{1}{2}$ " on wrong side bottom and  $\frac{1}{2}$ " on right-side top;  
press on line on top mark


On accent fabric, mark  $\frac{1}{2}$ " on wrong side top and  $\frac{1}{2}$ " on right side bottom;  
press bottom mark

Fold mesh in half to measure roughly 18" x 18", mark 3  $\frac{1}{2}$  inches from fold on both sides;  
use a sharpie or something you can see to mark.



## Station 2: Sew Station



Line up bottom raw edge of main fabric with line marked on vinyl and stitch on marked line. Flip fabric, finger press and topstitch. Topstitch top edge of main fabric approx.  $\frac{1}{4}$  from folded edge. \*Repeat for other side.

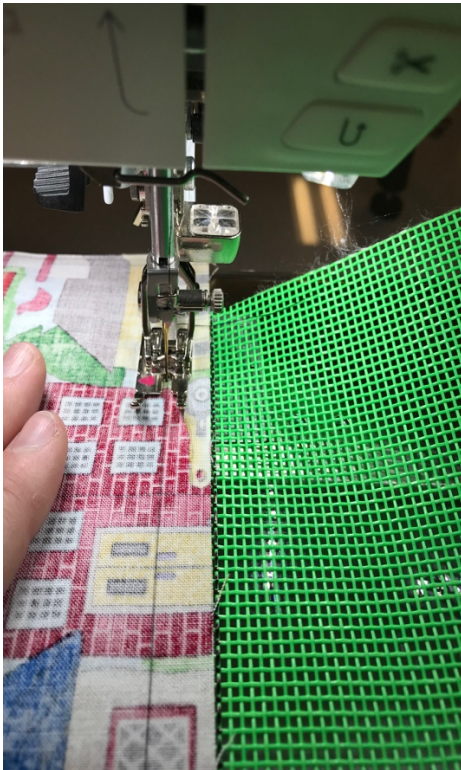




### Station 3: Trim Station

Pin right sides together at main fabric, trim to square. Do not cut folded edge of mesh. On top edge of mesh, find center – mark  $2\frac{1}{2}$ " on each side of center. This marks inner edge of handles.

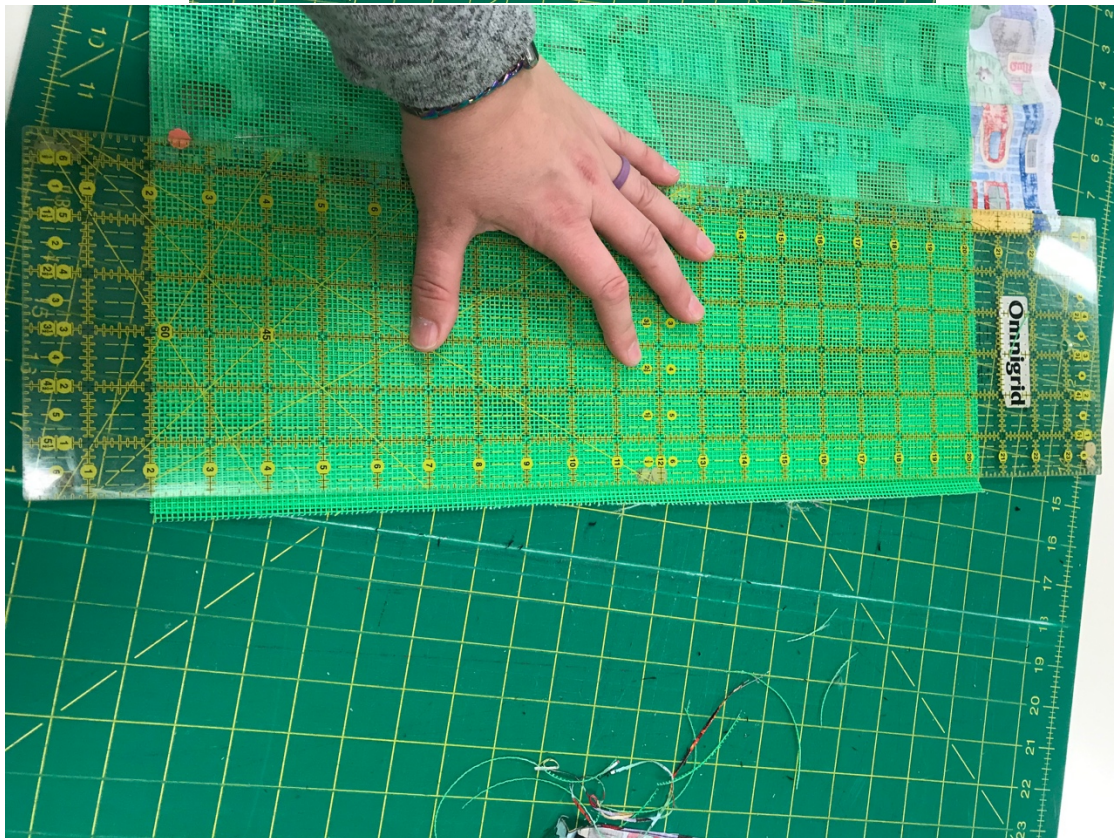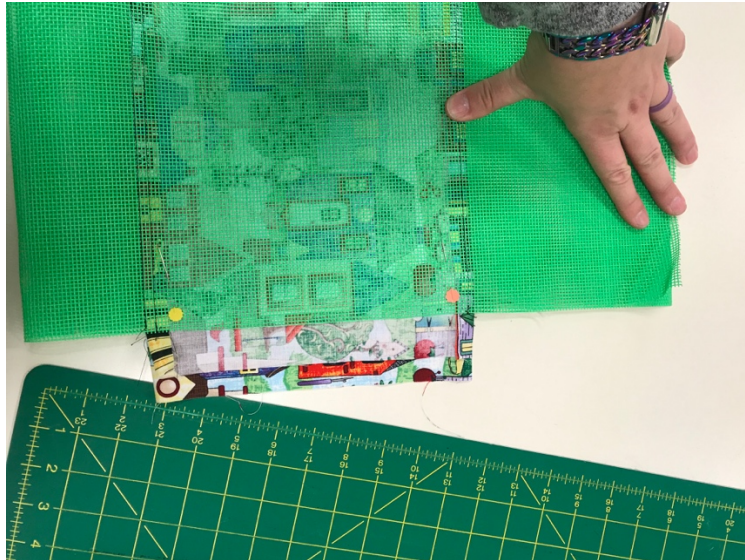

#### Station 4: Sew Station


Stitch handles in place on wrong side of mesh, raw edge of webbing to raw edge of mesh.  
Place accent piece over handles and stitch on drawn line. \*repeat for other side

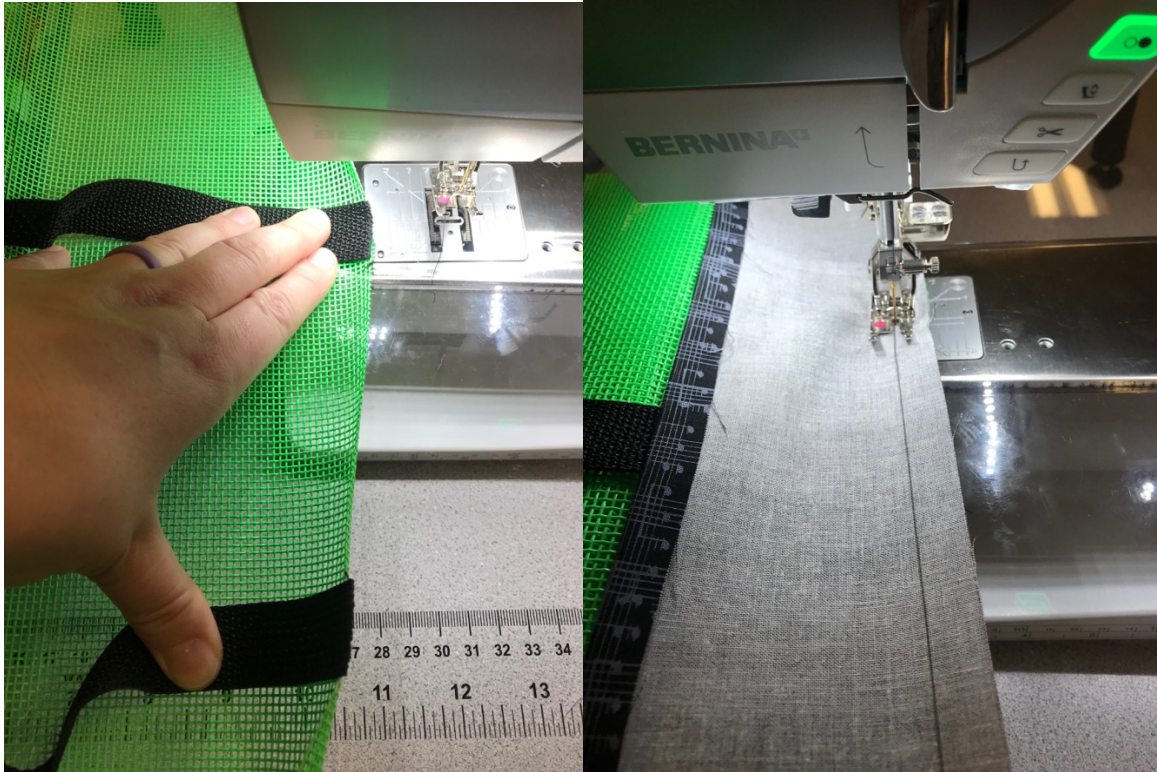




### Station 5: Sew Station

Flip to right and topstitch on both edges (1/4" from top edge and folded bottom edge)  
Place license plate or other embellishment on top edge. (OPTIONAL)

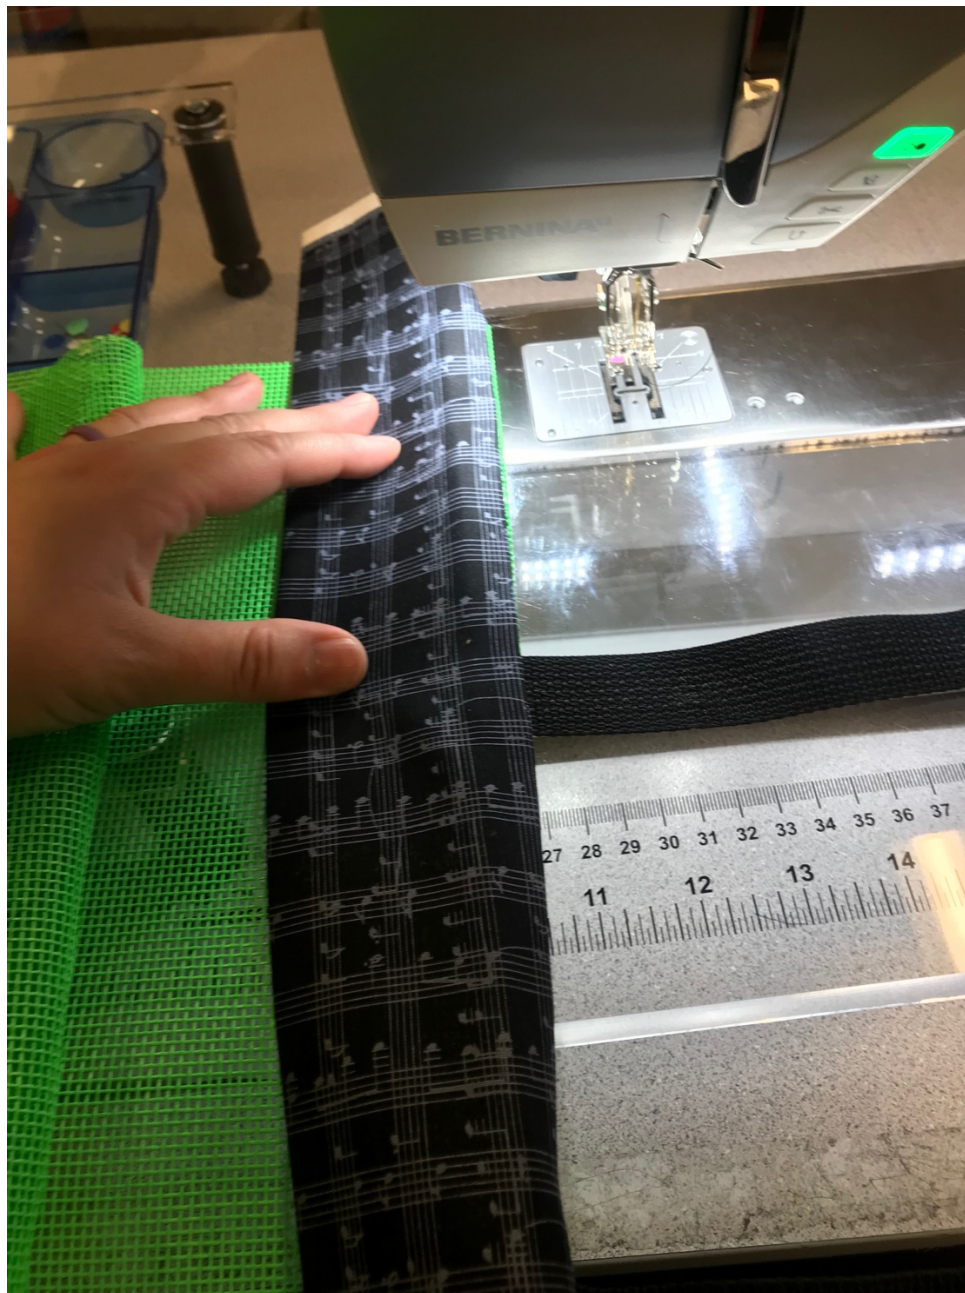

## Station 6: Trim station



Trim excess from accent piece.

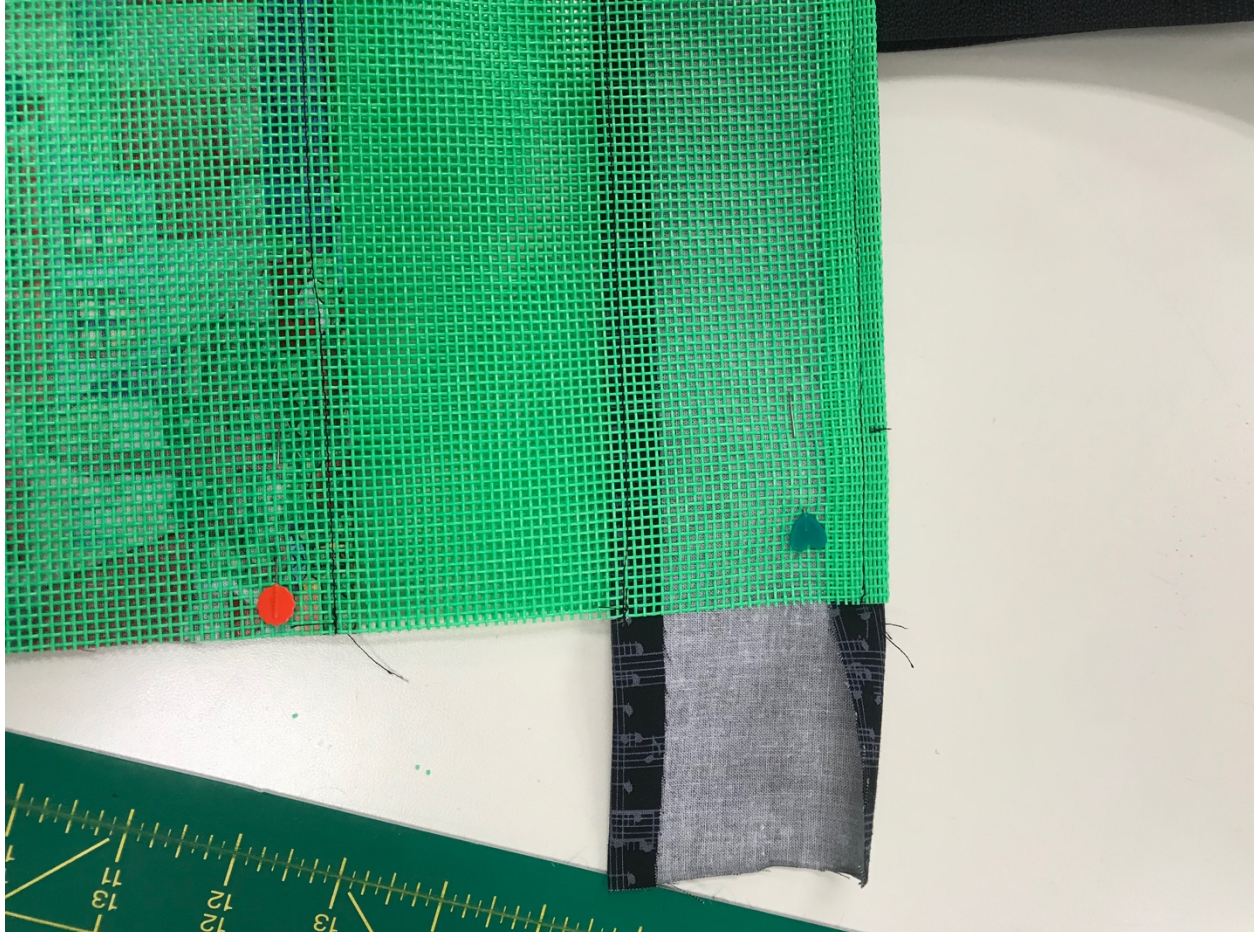




### Station 7: Sew Station

Place right sides together and sew side seams.  
Grab your bias tape - (2) 20" pieces. Fold ends over and topstitch onto seam.

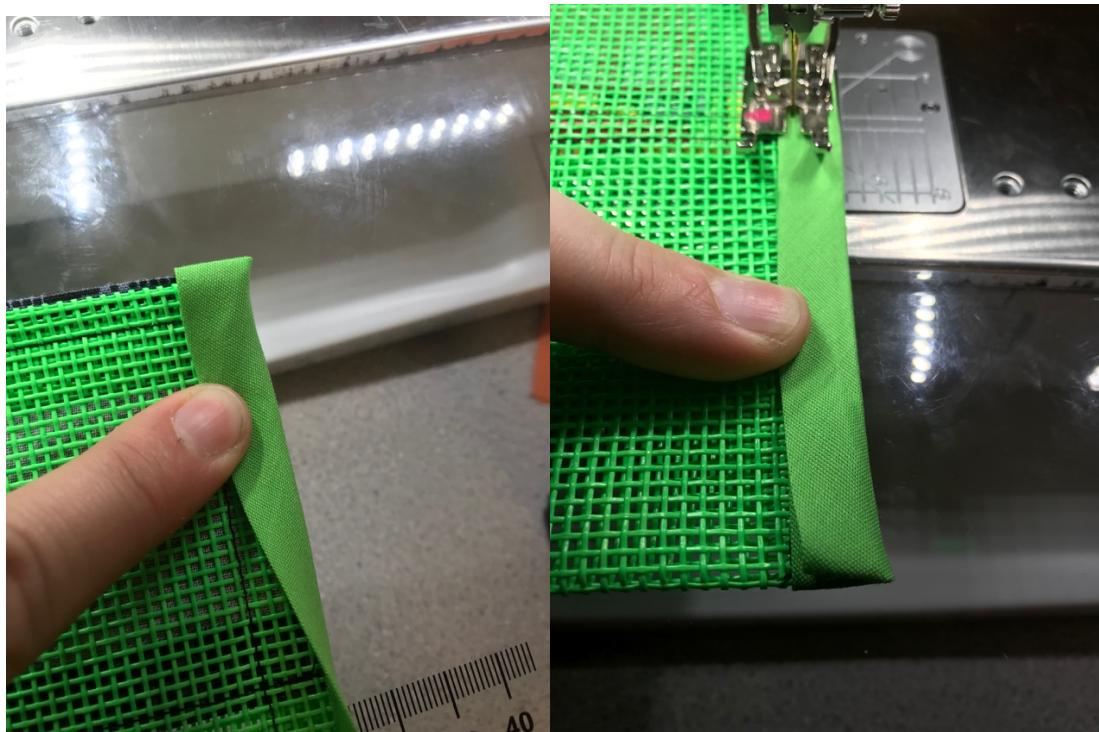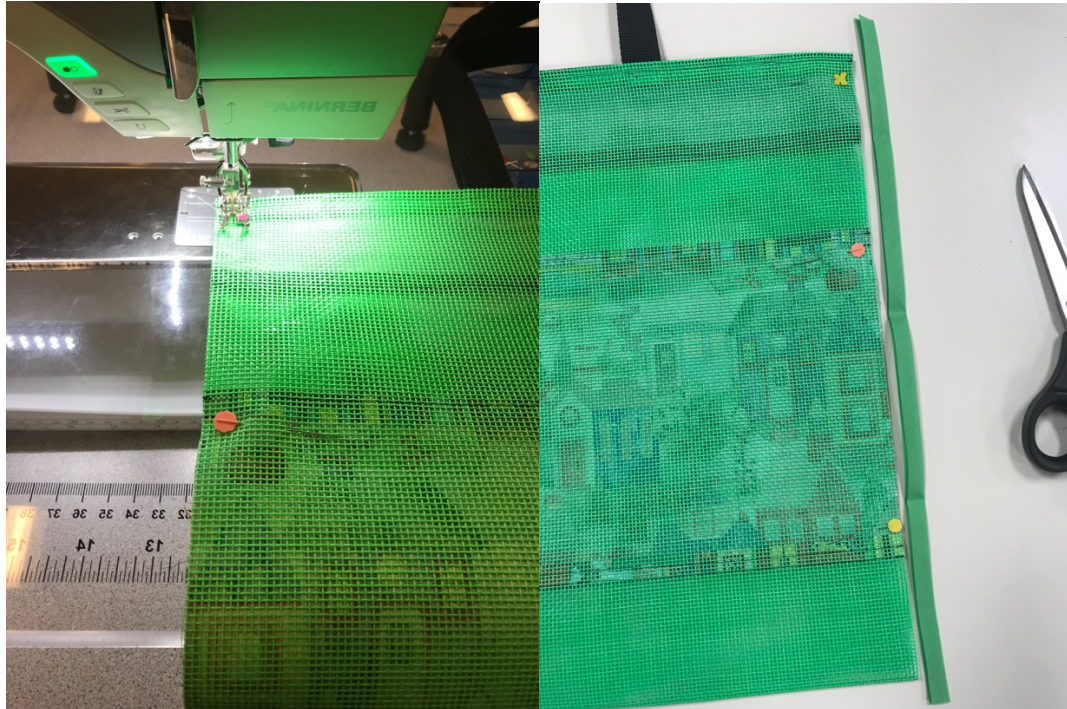

## Station 8: Sew Station

Box pleat bottom of bag.

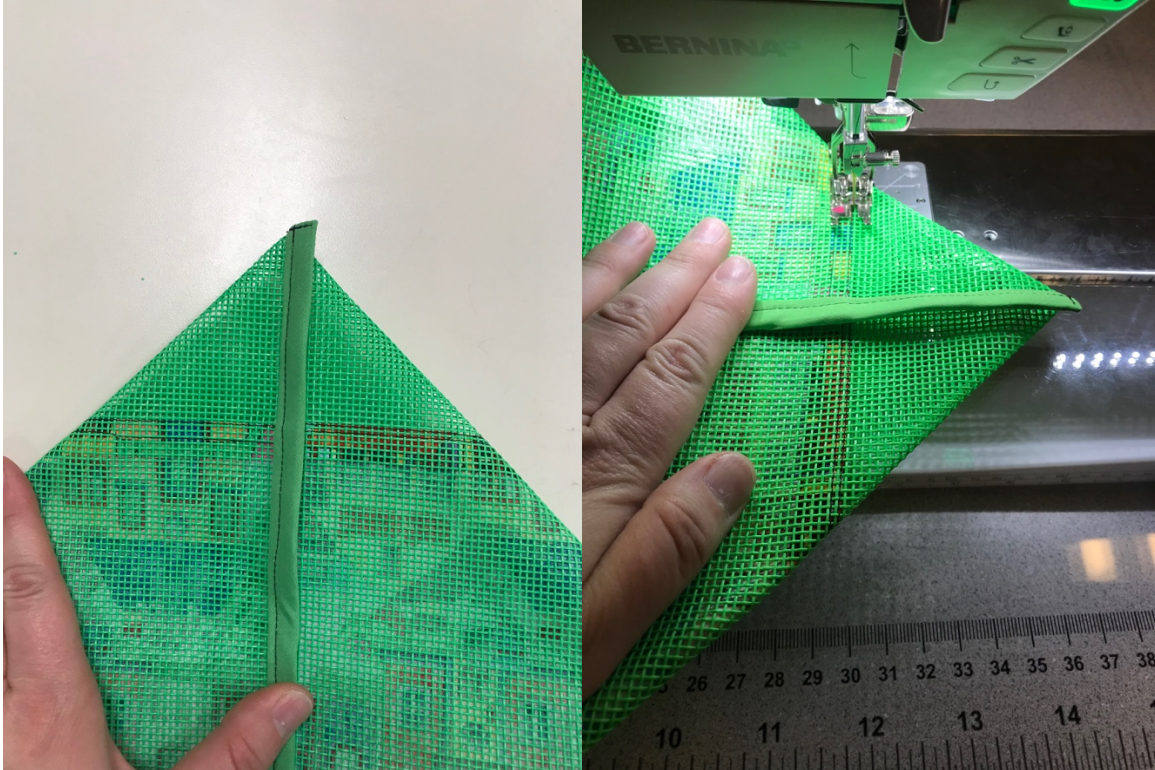

And Finally:  
Turn right side out and admire  
your new bag!