

BBWP series

High speed, Twin needle, Compound feed and walking foot, 2.0 times large hook, Lockstitch sewing machine with automatic thread trimmer, Automatic backtacking, Automatic presser foot lift, Climbing device and dual stitching device



BBWP-28BLC-BTFL-CD-DS

Variety



BBWP-8BL

Compound feed and walking foot, reverse stitch.

BBWP-8BL-BTFL

w/auto, BTFL



BBWP-8BLC-BTFL-CD-DS

Compound feed and walking foot, reverse stitch, thread trimmer, automatic back tack, automatic presser foot lift, climbing device, dual stitching device.



BBWP-28BL

Compound feed and walking foot, reverse stitch,

BBWP-28BL-BTFL

w/auto, BTFL





BBWP-28BLC-BTFL-CD-DS


Compound feed and walking foot, reverse stitch, thread trimmer, automatic back tack, automatic presser foot lift, climbing device, dual stitching device

Applications


- For sewing medium to heavy weight materials such as leather, vinyl, synthetics and laminated and coated materials
- Suitable for sewing such as automobile upholstery tarpaulins, covers, awnings, tents, umbrellas handbags, luggage, travelware accessories, sports and camping equipment and wearing apparel outdoor clothing.



BBWP series

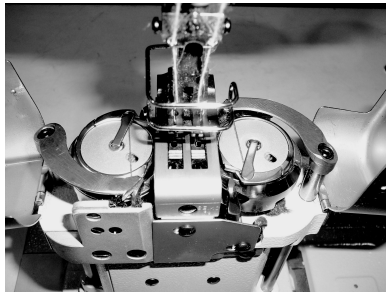


2.0 times large capacity hook

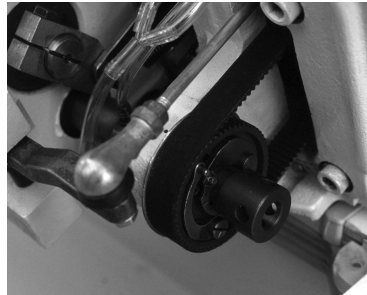

Safety device




One touch switchover for two different stitch lengths (DS Device)

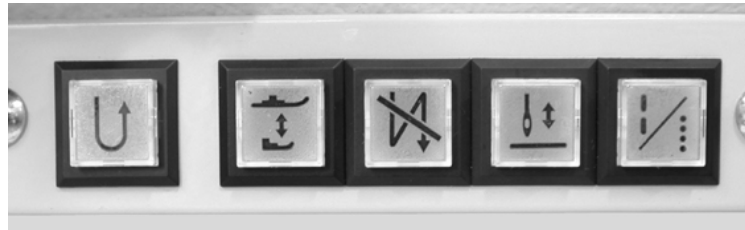


5 operational switches

General specification		
	BBWP-8BL(28BL)	BBWP-8BLC(28BLC)-BTFL-CD-DS
Number of needle	Single(Two) needle	
Max. sewing speed	2,500 s.p.m.	
Max.stitch length	9.0mm(Forward/Reverse)	
Clearance under presser foot	9mm (by hand) 16mm (by automatic foot lifter)	
Needle bar stroke	34mm	
Needle	DP × 17 #24	DP × 17 #22
Thread	#5	#8
Hook	Large vertical axis hook (2.0 times)	
Post height	178mm	
Thread take up lever	Link type	
Amount of walking foot movement	1~7mm	
Walking foot movement change switch	Dial type	
Bobbin winder	Built-in type	
Auto presser foot lifting device		Pneumatic
Walking foot movement change device		Pneumatic
Lubrication	Semi-automatic lubrication type	
Bed size/Working space	567mm × 177mm / 300mm × 120mm	
Net weight (Head only)	61Kg	65Kg
Motor	Clutch Motor	AC servo motor

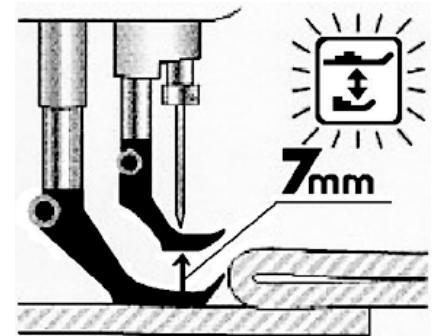

Smooth stitching on step section (CD device)

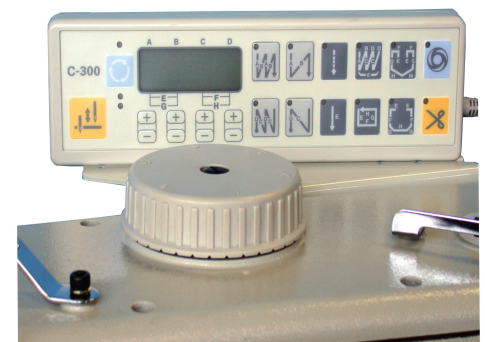

Simple setting for alternating presser foot movement

NOTE (1) Speed depends on threads, materials and type of operation
(2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

Printed in Japan 2011.03

<http://www.seiko-sewing.co.jp/>