

# DN-8E-AP

High speed, Double chainstitch Binding Edge Sewing machines



DN-8E-AP

## Variety




DN-8E-AP

Compound feed and walking foot, with pneumatic pressure control



Tape binding

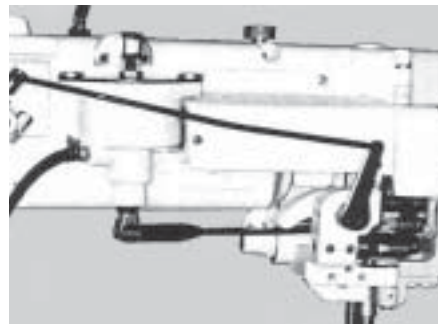

Presser by pneumatic pressure (AP)

Pneumatic pressure assures constant stitching even for heavy duty materials.

## Features

- Semi-automatic lubrication system
- Reduced noise level
- Easy accessibility for threading loopers
- Stitch lengths adjusted by needle feed and drop feed motions separately
- No bobbin winding or changing(double chain stitch)
- Compound feed and walking foot mechanism ensures even feeding of article being sewn

## Specifications

Variety	DN-8E-AP
Number of needle	Single needle
Max. sewing speed	3,500 s.p.m.
Max.stitch length	19/64" (7.6 mm)
Clearance under presser foot	9/32" (7 mm)
Needle bar stroke	1-7/16" (36.5 mm)
Clearance from Bed edge to needle	1/4" (6.0 mm)
Needle(standard)	DV x 59 (#22) / 62 x 59 (#140)
Thread	#8 (standard)
Thread take up lever	Needle bar type
Amount of lift of walking foot	3/64"-13/64" standard 3/32" (1 - 5 mm) (standard 2.5 mm)
Lubrication	Semi-automatic type
Bed size	20-25/64"x 6-31/32" (405 x 177 mm)
Working space	10-5/8"x 5-5/16" (270 x 125 mm)
Motor	AC Servo motor
Net weight(Head only)	38.5Kg

NOTE (1) Speed depends on threads, materials and type of operation  
(2) Specifications subject to change without notice



### SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi  
Chiba Prefecture, 273-0018, Japan  
Phone : +81-47-420-3561 (Overseas dept.)  
Fax : +81-47-420-3560  
E-mail : export@seiko-sewing.co.jp

<http://www.seiko-sewing.co.jp/>