

LDA series

High speed, Feed-off-the-arm, Drop feed, Double chain stitch machines



LDA-T26-1

Variety



LDA-L26-1

Two needle, for light weight materials



LDA-T26-1


Two needle, for heavy weight materials



LDA-T26-1



LDA-T26-1

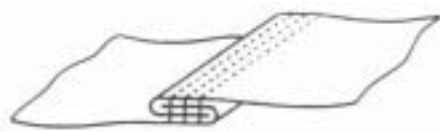

LDA-T36-1



Applications

For sewing light to heavy weight materials

Suitable for sewing shirts, sleep suit, jeans, pants, skirts, uniforms, heavyoveralls, raincoats, difficult to sew tubular products, etc.



Features

Fully automatic lubrication

Clear, unobstructed view of work area for operator with ample work space to right of needles

Easy access to stitch regulator and looper avoiding motion adjustment

Oil flow window indicates oil circulation

Non-slip belt drive to bed mechanism assures smooth, positive power feeding

Under threading readily accessible through hinged covers

Specifications (LDA-)

Variety	L26-1	T26-1
Number of needle	Two needle	
Max. sewing speed	6,500 s.p.m.	5,000 s.p.m.
Max. stitch length	7/16" (2.5 mm)	11/64" (4.2 mm)
Clearance under presser foot	1/4" (6.4 mm)	5/16" (8 mm)
Needle bar stroke	1-1/16" (27 mm)	1-5/16" (33.3 mm)
Needle(standard)	TVx7 (#16) 149x7 (#100)	TVx3 (#21) TVx3 (#130)
Thread	#40 (standard)	#20 (standard)
Lubrication	Full automatic type	
Motor	Clutch motor	

NOTE

(1) Speed depends on threads, materials and type of operation

(2) Specifications subject to change without notice

Needle gauge list

Variety	Needle gauge size
L26-1	3/32"(2.4mm) , 1/8"(3.2mm) , 5/32"(4mm) , 3/16"(4.8mm) , 1/4"(6.4mm) , standard 1/4"(6.4mm)
T26-1	3/16"(4.8mm) , 1/4"(6.4mm) , standard 1/4"(6.4mm)



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

<http://www.seiko-sewing.co.jp/>