


# LLW / LLWH single needle series

High speed, Extra long (18 inch) arm, Large vertical axis hook, Compound feed and walking foot, Coarse stitch, Lockstitch machines

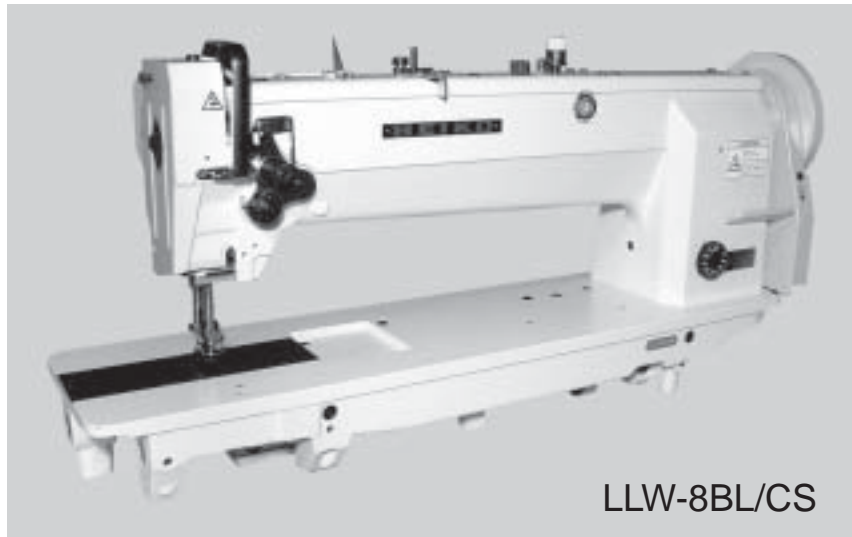

LLW-8BL/CS

## Variety




LLW-8BL/CS  
Reverse stitch



LLW-8BLC/CS  
Reverse stitch, thread trimmer



LLWH-8BL/CS  
Reverse stitch, high arm(47 mm extra height)

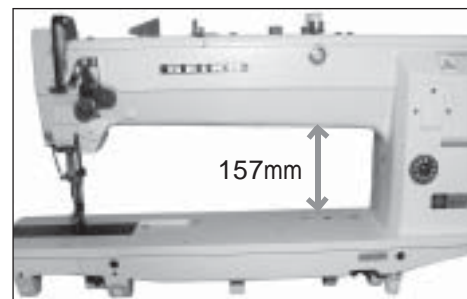

LLWH-8BL/CS

## Applications

For sewing medium to heavy weight fabrics, leather, vinyl, synthetics, laminated and coated materials.

Suitable for canvas, tents, awnings, tarpaulins, upholstery, automotive trim, etc.



## Features

- 18 inch long arm.
- Large vertical axis hook.
- Semi-Automatic lubrication system.
- Automatic hook lubrication.
- Safety clutch prevents the hook from being damaged.
- Longer stitch length 10 mm (except thread trimming machine).
- Reverse stitching.
- Available in "Thick Thread Version"(for heavier material) add suffix "TA" when ordering.
- Synchronized cloth puller available (add suffix "R").
- Automatic back tack (BT) and foot lift (FL) available.
- Two needle version available.

## Specifications (LLW- )

Variety	8BL/CS	8BLC/CS	LLWH-8BL/CS
Number of needle	Single needle		
Max. sewing speed	2,200(s.p.m.)		2,000(s.p.m.)
Max. stitch length	25/64" (10 mm)	5/16" (8 mm)	25/64" (10 mm)
Clearance under presser foot	by knee	19/32" (15 mm)	
	by hand	5/16" (8 mm)	
Needle bar stroke	1-25/64" (35.4 mm)		
Needle(standard)	DPx17 (#22) , 135x17 (#140)		
Thread	#8 (standard)		
Hook	Large vertical axis hook		
Amount of lift of walking foot	3/32"-9/32" standard 9/64" (2.5 - 7 mm) (standard 3.5 mm)	1/8"-15/64" standard 5/32" (3 - 6 mm) (standard 4 mm)	3/32"-9/32" standard 9/64" (2.5 - 7 mm) (standard 3.5 mm)
Thread take up lever	Slide type		
Lubrication	Semi-Automatic lubrication		
Bed size	28-17/64" x 7" (718 x 177 mm)		
Working space	18-1/32" x 4-21/64" (458 x 110 mm)		18-1/32" x 6-3/16" (458 x 157 mm)
Motor	Clutch motor	AC Servo motor	Clutch motor
Net weight(Head only)	46Kg		53Kg

NOTE

- (1) Speed depends on threads, materials and type of operation
- (2) Specifications subject to change without notice
- (\*) Max. sewing speed for "TA" machines are 1600 s.p.m.



**SEIKO SEWING MACHINE CO., LTD.**

2-13-6, Sakaecho, Funabashi-shi  
 Chiba Prefecture, 273-0018, Japan  
 Phone : +81-47-420-3561 (Overseas dept.)  
 Fax : +81-47-420-3560  
 E-mail : export@seiko-sewing.co.jp

<http://www.seiko-sewing.co.jp/>