

LSW single needle series (special purpose)

High speed, Large vertical axis hook, Compound feed and walking foot, Lockstitch machines



LSW-8LVMF

Variety



LSW-8LVMF

Vertical edge trimming (front), synchronized binder(*)



LSW-8BLVMF

Vertical edge trimming (front), reverse stitch, synchronized binder(*)



LSW-8BLM

Vertical edge trimming(right), reverse stitch




LSW-8LVMF

(*)Available various special binder at extra charge


Applications

For sewing medium to heavy weight fabrics, leather, vinyl, synthetics and laminated and coated materials

Designed for operation such as tape binding, edge trimming for quilt, cushion, cover and automobile-interior.



LSW-8BLVMF



LSW-8BLM

- * 8LVMF Bedding, cover, carpet.
- * 8BLVMF Bedding, cover, carpet.
- * 8BLM Heavy weight materials, automobile-interior and exterior decorations with trimming works.

LSW single needle series (special purpose)

Features


Seaming, tape binding and trimming can be performed by one operation.

Large vertical axis hook. (Automatic hook lubrication)

Safety clutch prevents the hook from being damaged.

Reverse stitching.

Special binder can be supplied upon your request.




Sewing and Trimming can be performed by one operation



Suit for sewing and trimming simultaneous for leather, vinyl, heavy materials, automobile-interior, exterior decorations.

Trimming(front). Taping can be performed by one operation.

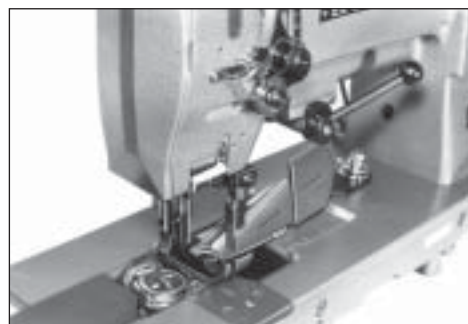

Suit for trimming and taping simultaneous for bedding, cover, cushion and carpet, etc. Trimming can be made in front of needle.

Specifications (LSW-)

Variety		8LVMF	8BLVMF	8BLM
Number of needle		Single needle		
Max. sewing speed		2,500(s.p.m.)		
Max. stitch length		11/32" (9 mm)	1/4" (6.2 mm)	
Clearance under presser foot	by knee	15/32" (12 mm)		
	by hand	21/64" (8.5 mm)		
Needle bar stroke		1-5/16" (33.2 mm)		
Needle(standard)		MTx190 (#19) , 190R (#120)		DPx17 (#22) , 135x17 (#140)
Thread		#30 (standard)		#8 (standard)
Hook		Large vertical axis hook (2.0 times)		
Amount of lift of walking foot		1/8"-15/64" standard 5/32" (3 - 6 mm) (standard 4 mm)		
Standard binder spec (extra charge)		4-Fold Tape width 2-3/8"(60 mm)		
Distance between seam and cutting edge		6 - 18 mm (standard 14 mm) 15/64"- 45/64" (standard 35/64")		4, 5, 6.5, 8, 10 mm (standard 8 mm) 5/16" ~ 25/64" (standard 5/16")
Thread take up lever		Slide type		
Lubrication		Semi-automatic type		
Bed size		20-25/64"x 7" (518 x 177 mm)		
Working space		10-5/32"x 3-35/64" (258 x 90 mm)		
Motor		Clutch motor		
Net weight(Head only)		34Kg		

NOTE (1) Speed depends on threads, materials and type of operation (2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

<http://www.seiko-sewing.co.jp/>