


HOW TO MITER 90-DEGREE CORNERS

1. Mark a dot on each corner of the back of the quilt, $\frac{1}{4}$ " away from both edges (see Figure 1).
2. Align the center of the border strip with the center of the quilt, on the side to be sewn. Pin up to the dots.
3. Sew the border to the quilt center, from dot to dot. Backstitch to secure the seam.
4. Press towards the quilt.
5. Sew the other three borders to the quilt center, dot to dot (see Figure 2).
6. Fold the quilt in half, RST, diagonally (Figure 3). Align the border strips making sure outer raw edges as well as the seam lines are even.
7. Using a long ruler, line up the edge of the ruler against the folded edge of the block. Using the ruler as a guide, draw a line from the end of the seam line (the dot) to the end of the border.
8. Pin the borders. If the border is a striped fabric, make sure that the stripes match.
9. Sew on the drawn line, starting at the end of the seam and sewing outwards.
10. Open the fold (Figure 4) and verify the miter is at a 45° angle.
11. Trim excess fabric.
12. Press.

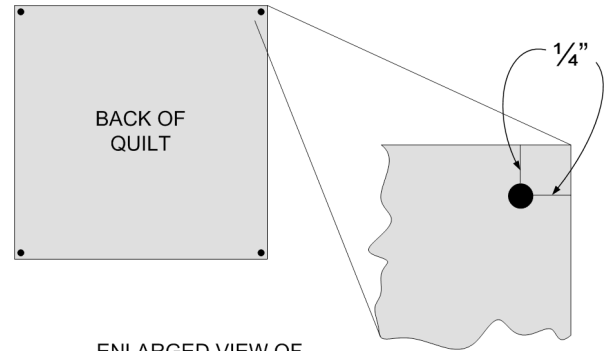

ENLARGED VIEW OF THE CORNER OF THE QUILT

Figure 1

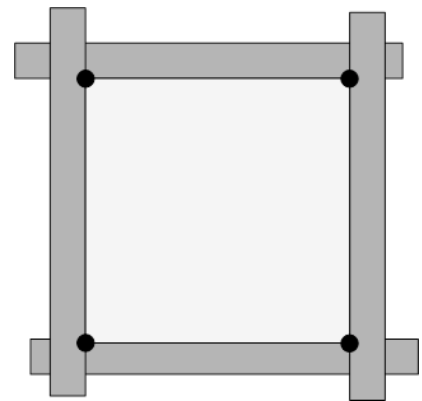


Figure 2

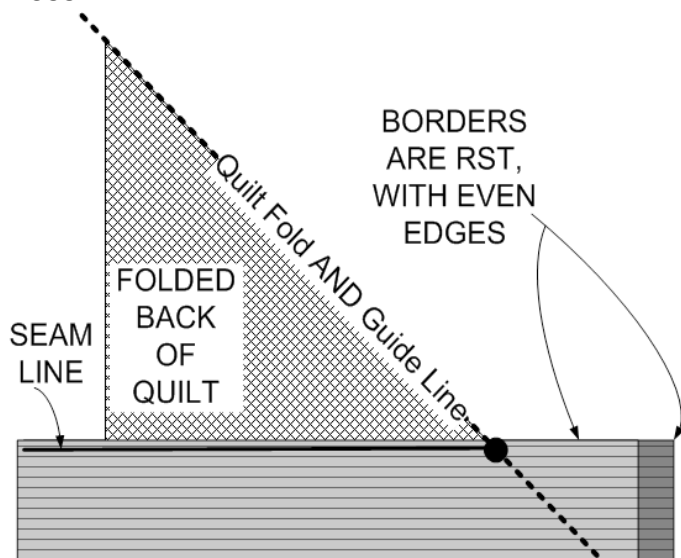


Figure 3

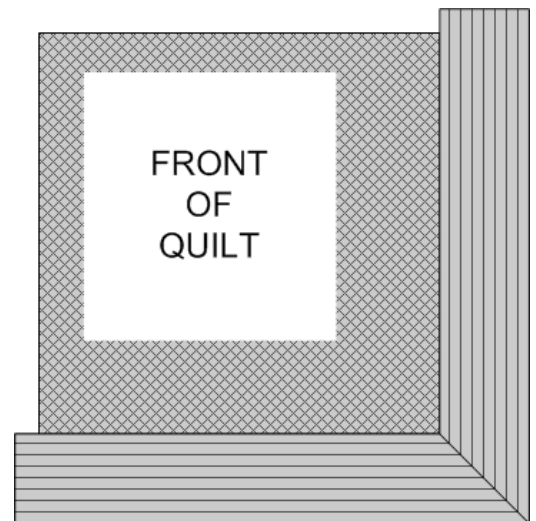


Figure 4