

Walker bag materials list

Curly Girl Pattern Company


By Tawni Young

Copyright 2025

- Two pieces of fabric measuring 18" x 36".
- Medium weight fusible interfacing 18" x 36"
- Ties or ribbon – 54". Make your ties from ribbon, or bias tape which has been sewn closed.
- 16" of sew-on Velcro.

Cut two pieces of fabric to 18" by 36". Follow the manufacturer's instructions to adhere the interfacing to the wrong side of the fabric chosen for the underside and pocket fronts of the bag.



With the interfaced fabric wrong side up, mark 8 inches from one short end and 6 inches from the other short end. Fold the two ends up at the marked lines and press to crease. The folded sections will become the pockets. Then, keeping the pressed ends folded up, fold the whole piece in half right sides together to find the center and press that fold as well.

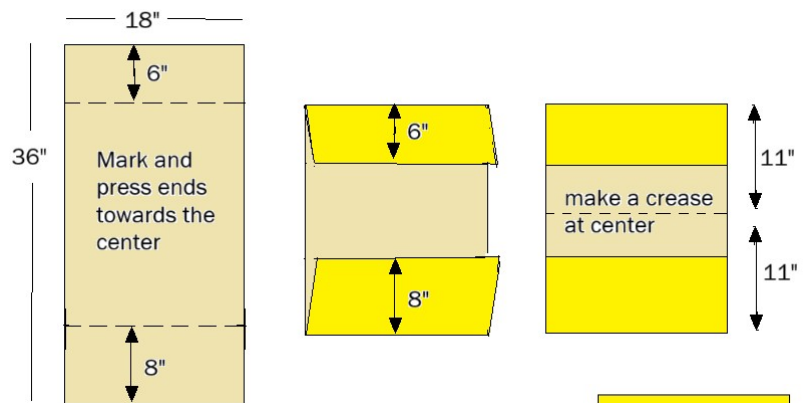

Unfold the interfaced fabric and lay it right side up (interfaced side down.) Position and pin the ties a 1/4" above the pocket creases (closer to the center than the ends) with the end of the ties sticking out beyond the edge of the fabric by about 1/8", as shown at right. Baste in place close to the edge.

Position the Velcro strips 4 inches to each side of the center crease. Sew all the way around the Velcro, close to the edges.

Now place the other piece of fabric on top, with right sides together and pin or use fabric clips to secure. Stitch all the way around, 3/8" from the edge - leave an opening for turning and locking your stitches at beginning and end. Pivot at corners, then trim bulk from the corners before turning.

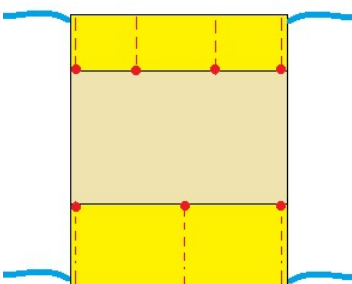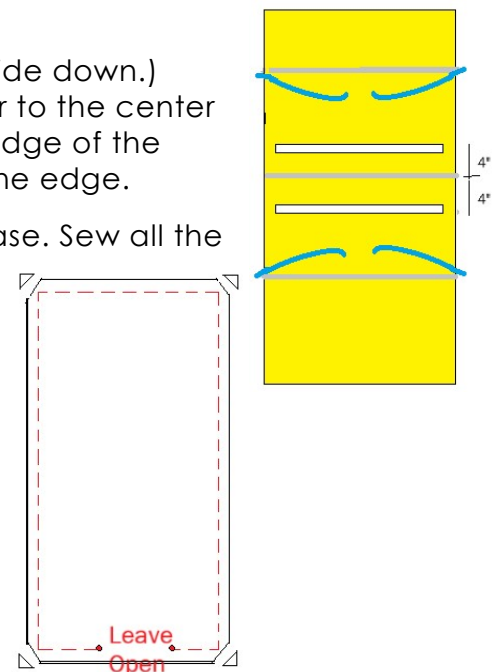

Turn the caddy right side out. Press the edges and topstitch all around the edges, closing the hole you used to turn it right side out. Fold the pockets back up and stitch down sides, backstitching to reinforce the top edges of the pockets. Sew dividing lines on the pockets, backstitching at these top edges as well.