

SIZE 75" x 90"



Designed by: Wendy Sheppard



Finished Size: 75" x 90"

FABRIC REQUIREMENTS

	Fabric A 28252 B ⅓ YARD 1 BOLT		Fabric B 28253 N ½ YARD 1 BOLT		Fabric C 28254 Z ½ YARD 1 BOLT		Fabric D 28255 B 1 ¼ YARDS 2 BOLTS
	Fabric E 28255 Z ½ YARD 1 BOLT		Fabric F 28256 B ½ YARD 1 BOLT		Fabric G 28256 H 1 YARD 1 BOLT		Fabric H 27935 BX 2 ½ YARDS* 2 BOLTS
	Fabric I 22083 Z 1 ½ YARDS 2 BOLTS		Suggested Backing 28253 B 5 ⅝ YARDS** 6 BOLTS	* includes Binding ** suggested backing fabric			

Information within gray box = Number of Bolts needed to make 12 Kits

We recommend that you carefully read through all instructions before getting started on your project.

CUTTING DIRECTIONS

WOF = width of fabric from selvage to selvage.
Label pieces with the fabric letter or letter/number combo. Remove as little fabric as possible when trimming selvages from WOF strips.

Fabric A, fussy cut the following, keeping the motif centered:

- (2) 8½"-wide x 11½"-tall A1 rectangles.
- (2) 13½" A3 squares.
- (2) 10½"-wide x 7½"-tall A2 rectangles.
- (2) 5½" A4 squares.

Fabric B, cut:

- (2) 5½" x WOF strips.
Subcut into (14) 5½" B1 squares.

Fabric C, cut:

- (2) 5½" x WOF strips.
Subcut into (10) 5½" C1 squares.

Fabric D, cut:

- (1) 25" x WOF strip.
Subcut into (8) 4" x 25" strips for border.
- (2) 5½" x WOF strips.
Subcut into (12) 5½" D1 squares.
- (4) 4" x WOF strips for border.

Fabric E, cut:

- (2) 5½" x WOF strips.
Subcut into (12) 5½" E1 squares.

Fabric F, cut:

- (1) 2½" x WOF strip.
Subcut into (4) 2½" x 8½" F1 rectangles.
- (6) 1½" x WOF strips.
Subcut into (8) 1½" x 15½" F2 strips,
(4) 1½" x 13½" F4 strips and
(4) 1½" x 10½" F3 strips.

Fabric G, cut:

- (6) 2½" x WOF strips.
Subcut into (8) 2½" x 15½" G1 strips and
(4) 2½" x 11½" G2 strips.
- (8) 1½" x WOF strips for border.

Fabric H, cut:

- (3) 15½" x WOF strips.
Subcut into (2) 15½" x 30½" H2 rectangles
and (2) 15½" H1 squares.
- (6) 1½" x WOF strips for border.
- (9) 2¼" x WOF strips for binding.

Fabric I, cut:

- (7) 3½" x WOF strips for border.
- (6) 2" x WOF strips for border.
- (5) 1" x WOF strips.
Subcut into (4) 1" x 15½" I1 strips,
(4) 1" x 11½" I3 strips and (8) 1" x 10½" I2 strips

Backing fabric, cut:

- (2) 98" x WOF pieces.

PANEL UNITS

Use a ¼" seam allowance for all stitching.

1. Sew F1 strips to the top and bottom of the A1 rectangles. Press seams toward the strips. Add I1 strips, then F2 strips and finally G1 strips to the long sides of the pieced units to complete (2) 15½" x 15½" A1 panel units. Press seams toward each added strip.



A1 Panel Unit – Make 2

2. Sew an F3 strip lengthwise between 2 I2 strips to make a 2½" x 10½" FI unit. Press seams toward F3. Repeat to make 4 units.



FI Unit – Make 4

3. Stitch F1 units to the top and bottom of the A2 rectangles. Press seams toward the A2 rectangles. Add I3 strips and then G2 strips to the sides of each pieced unit. Press seams toward each added strip. Stitch G1 strips to the top and bottom of each unit to complete (2) 15½" x 15½" A2 panel units. Press seams toward G1.




A2 Panel Unit – Make 2

4. Stitch F4 strips to the sides of the A3 squares. Press seams toward the strips. Add F2 strips to the top and bottom to complete (2) 15½" x 15½" A3 panel units. Press seams toward the strips.



A3 Panel Unit – Make 2

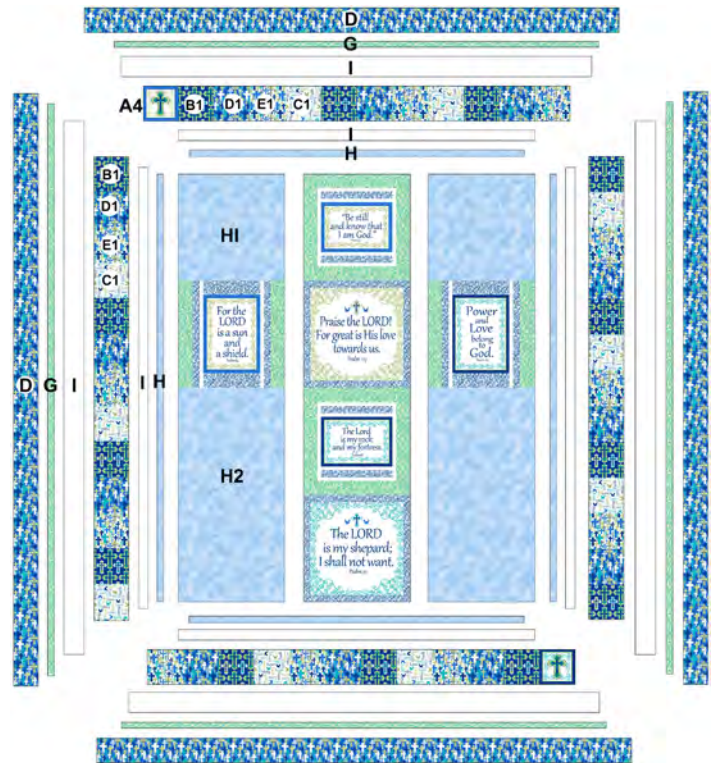

Exploded Quilt Diagram

QUILT ASSEMBLY

Refer to the exploded quilt diagram as needed throughout the following steps.

1. Sew an H1 square to the top of each A1 panel unit and an H2 rectangle to the bottom to complete the 15½" x 60½" left and right rows. Press seams toward the H pieces.
2. Stitch the A2 and A3 panel units alternately together to make the 15½" x 60½" center row. Press seams toward the A3 panel units.
3. Sew the center row between the left and right rows to complete the 45½" x 60½" pieced center. Press seams away from the center row.
4. Stitch the **Fabric H** 1½" x WOF strips short ends together to make a long strip. Press seams to 1 side. Cut into 2 strips each 60½" and 47½". Sew the longer strips to the sides of the pieced center and the shorter strips to the top and bottom. Press seams toward the strips.

5. Repeat step 4 with the **Fabric I** 2" x WOF strips, cutting 2 strips each 62½" and 50½".
6. Join 4 B1 squares and 3 each C1, D1 and E1 squares to make the 5½" x 65½" left border, referring to the exploded quilt diagram for positioning of each fabric. Press seams in 1 direction. Repeat to make the right border. Sew the borders to the long sides of the quilt center. Press seams toward the borders.
7. Join 1 A4 square, 2 C1 squares and 3 each B1, D1 and E1 squares to make the 5½" x 60½" top border. Press seams in 1 direction. Repeat to make the bottom border. Stitch the borders to the top and bottom of the quilt center. Press seams toward the borders.
8. Repeat step 4 with the **Fabric I** 3½" x WOF strips, cutting 2 strips each 75½" and 66½".
9. Repeat with the **Fabric G** 1½" x WOF strips, cutting 2 strips each 81½" and 68½".
10. Sew (4) 4" x 25" **Fabric D** strips short ends together to make a long strip. Press seams to 1 side. Trim to 83½" to make a side border. Repeat to make a second side border. Stitch the borders to the long sides of the quilt center. Press seams toward the strips.
11. Repeat step 4 with the **Fabric D** 4" x WOF strips, cutting (2) 75½" strips. Sew the strips to the top and bottom of the quilt center to complete the top. Press seams toward the strips.

FINISHING

1. Remove the selvage edges from the backing pieces. Join on the long edges with a ½" seam allowance. Press seam open. Trim to make the 83" x 98" backing piece.
2. Layer the backing, an 83" x 98" batting piece and the top. Pin or baste to hold.
3. Quilt as desired. Trim batting and backing even with the top.
4. Make double-fold binding using the **Fabric H** binding strips. Bind the edges of the quilt using your preferred method to complete the quilt.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for errors or the way in which individual work varies.