

featuring GARDENISTA COLLECTION BY AGF STUDIO

# ANGULAR motion

GARDENISTA EDITION



FREE PATTERN

XXXXXX XXXX XXXX XXXX XXXX

AGF

ART GALLERY FABRICS®




# ANGULAR motion

GARDENISTA EDITION

QUILT DESIGNED BY AGF studio

*gardenista*


FABRICS DESIGNED BY AGF STUDIO

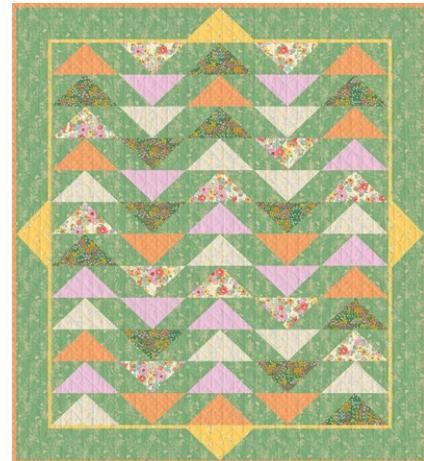

**Fabric A**  
CUR8-GA-505  
BLOOMING RAIN



**Fabric B  
Binding**  
CUR8-GA-507  
GARDEN GATE

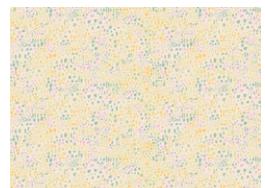

**Fabric C**  
CUR8-GA-503  
SEEDLING SCATTER



**Fabric D**  
CUR8-GA-501  
WHIRLWIND LEAVES



**Fabric E**  
CUR8-GA-500  
WILD FLORA SPRING



**Fabric F**  
CUR8-GA-502  
LUSH REVERIE



**Fabric G**  
CUR8-GA-504  
GROWING HERBS VERT



**Fabric H  
Backing**  
CUR8-GA-506  
GRASSY MEADOWS SHINE



© 2025 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.



# ANGULAR motion

GARDENISTA EDITION

FINISHED SIZE | 56½" x 65½"

**Please read all instructions thoroughly before beginning.**

## FABRIC REQUIREMENTS

Fabric <b>A</b>	CUR8-GA-505	½ yd.
Fabric <b>B</b>	CUR8-GA-507	1 yd.
Fabric <b>C</b>	CUR8-GA-503	½ yd.
Fabric <b>D</b>	CUR8-GA-501	½ yd.
Fabric <b>E</b>	CUR8-GA-500	½ yd.
Fabric <b>F</b>	CUR8-GA-502	½ yd.
Fabric <b>G</b>	CUR8-GA-504	3½ yd.

### BACKING FABRIC

CUR8-GA-506 4½ yds (Suggested)

### BINDING FABRIC

Fabric **B** CUR8-GA-507 (Included)

## CUTTING DIRECTIONS

*Please ensure that all fabrics are ironed thoroughly before cutting them. ¼" seam allowances are included. WOF means width of the fabric.*

### Fabric A

- Cut 1 (one) 5" x WOF strip, then;  
Sub-cut into 4 (four) 5" x 9½" rectangles.
- Cut 6 (six) 1" x WOF strips.

### Fabric B

- Cut 3 (three) 5" x WOF strips, then;  
Sub-cut into 12 (twelve) 5" x 9½" rectangles.
- Cut 7 (seven) 2½" x WOF strips. (**BINDING**)

### Fabric C through F

- Cut 3 (three) 5" x WOF strips, then;  
Sub-cut into 12 (twelve) 5" x 9½" rectangles

### Fabric G

- Cut 24 (twenty-four) 5" x WOF strips, then;  
Sub-cut into 8 ( eight) 5" x 23½" strips.  
Sub-cut into 128 (one hundred and twenty eight) 5" squares.

## CONSTRUCTION

Sew all rights sides together with  $\frac{1}{4}$ " seam allowance.

### Flying Geese Construction.

- Place 1 (one) 5" square from fabric **G** on the right edge of 1 (one) 5" x 9½" rectangle from fabric **A** and mark a diagonal line from the top left to the bottom right corner of the square. Sew on the drawn line and trim  $\frac{1}{4}$ " away from the seam and press.

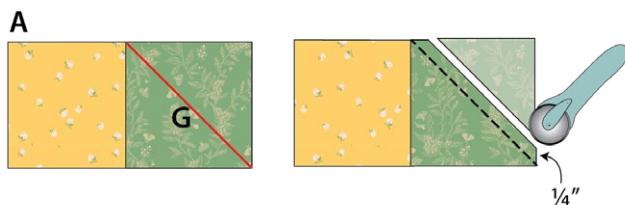


DIAGRAM 1

- Place another 5" square from fabric **G** on the left edge of the same piece, mark a diagonal line from the top right to the bottom left corner of the square and sew through the line.
- Trim  $\frac{1}{4}$ " away from the seam and press.
- Each flying geese unit should measure 5" x 9½".

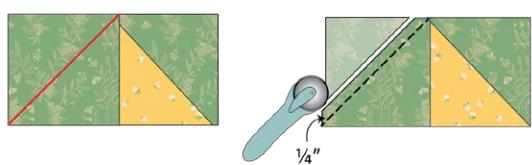


DIAGRAM 2

- Make a total of 2 (two) **GAG** flying geese combination.



DIAGRAM 3

- Repeat the Flying Geese Construction with the following fabric combinations: **B-C-D-E** and **F**.

**GBG**



**GCG**



**GDG**



**GEG**



**GFG**



DIAGRAM 4



- Sew all flying geese units into 12 (twelve) rows of 5 (five) units each, then sew rows together.

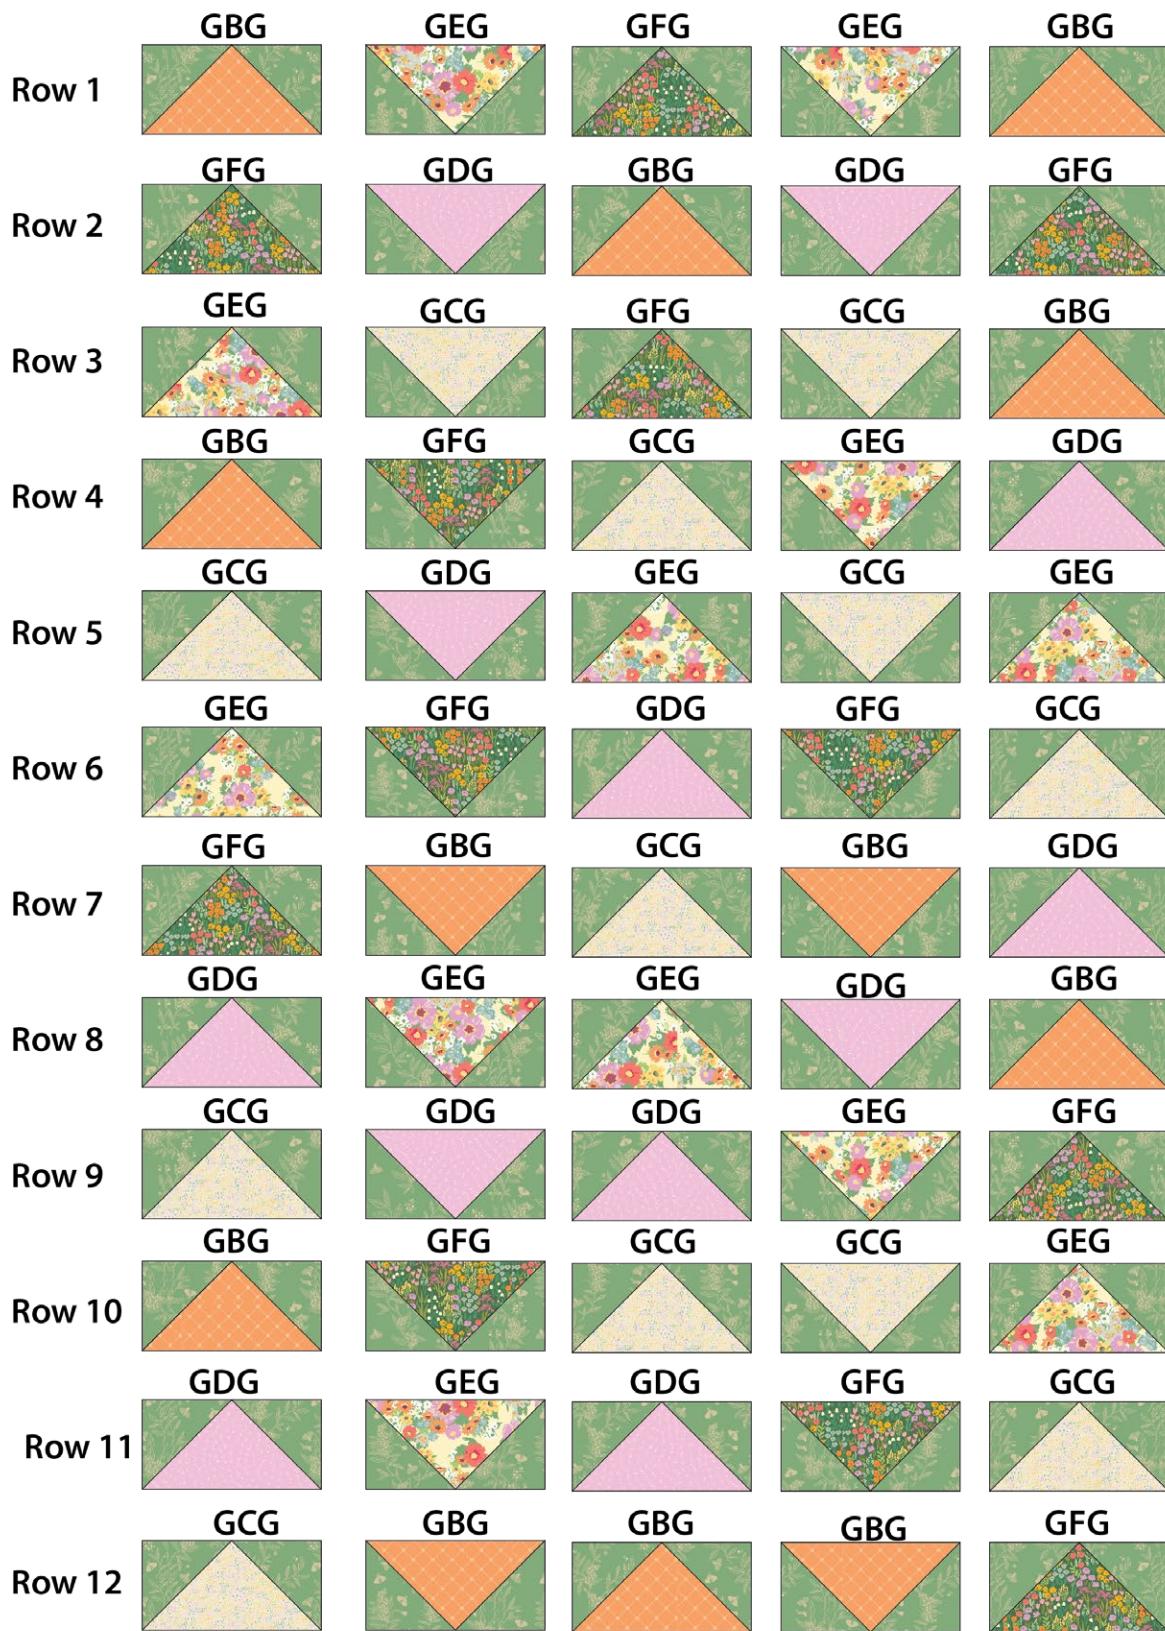


DIAGRAM 5

- Join all 6 (six) 1" x WOF strips from Fabric **A**, short ends together to make a long strip.
- Measure the length of each side of the quilt. Average those numbers and cut 2 border strip to that measurement or to  $54\frac{1}{2}$ " long if quilt top is true to size. Sew to the sides of the quilt.

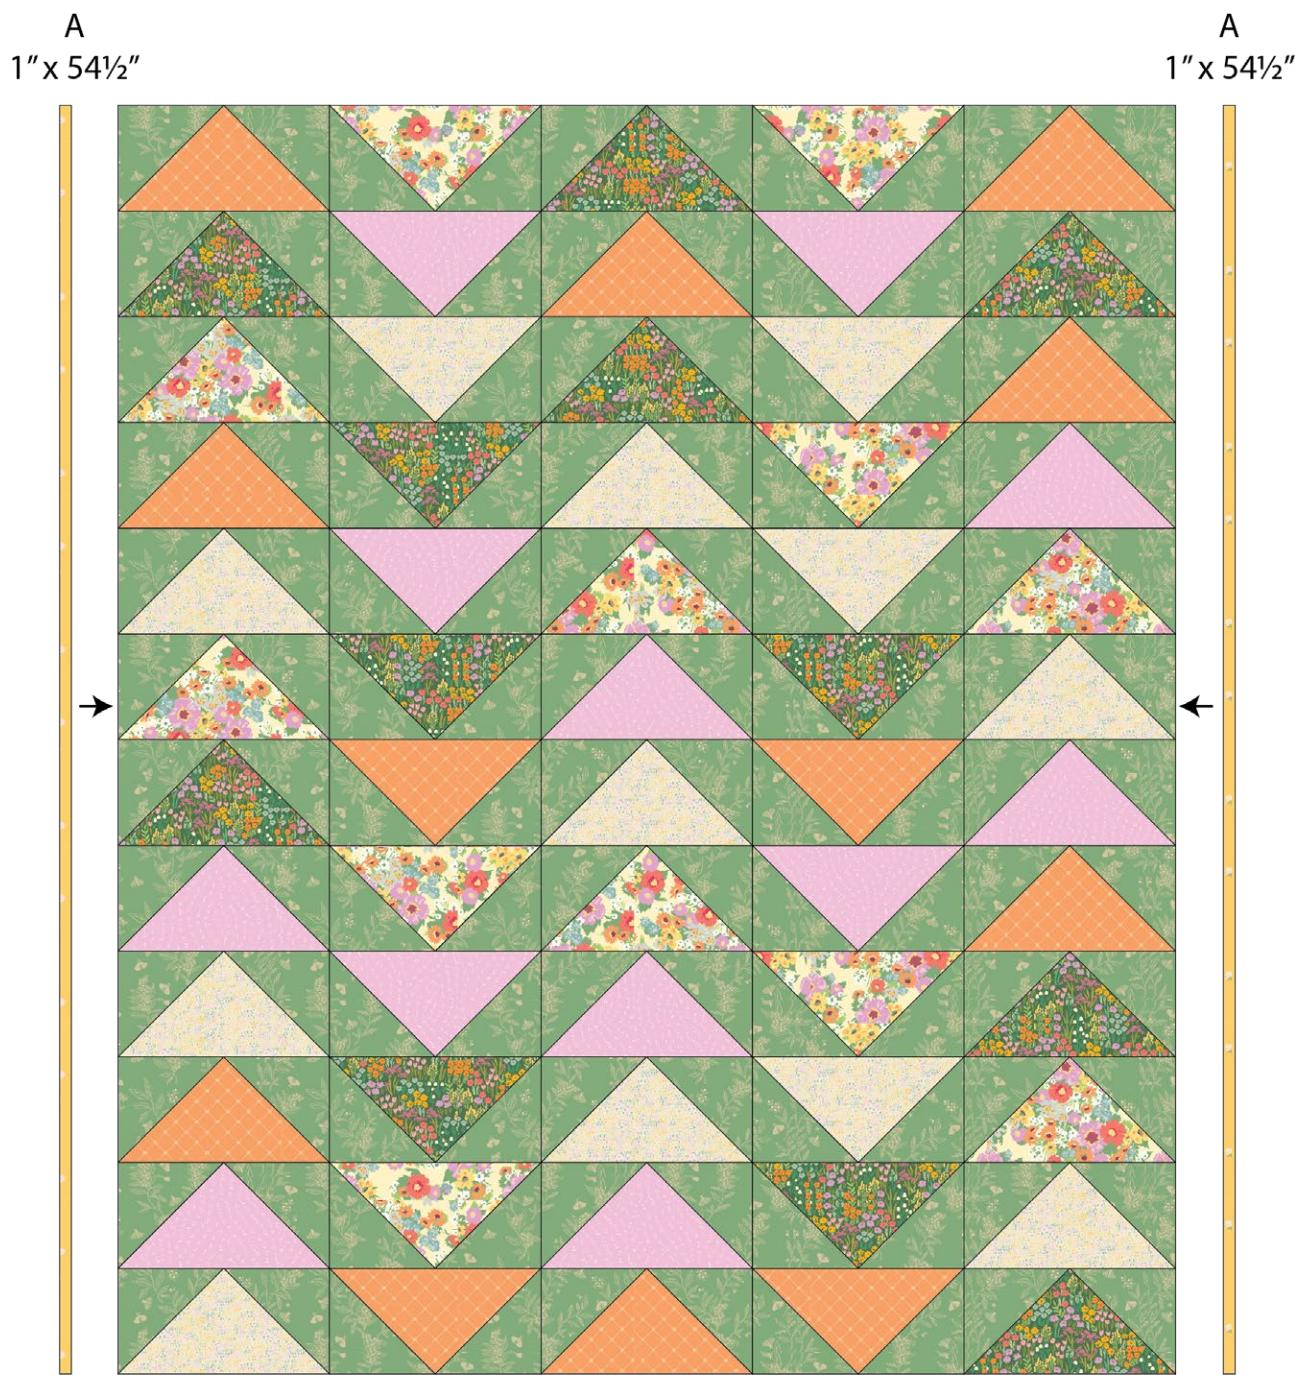


DIAGRAM 6

- Measure the top and bottom of the quilt. Average those numbers and cut 2 border strip to that measurement or to  $46\frac{1}{2}$ " long if quilt top is true to size. Sew to the top and bottom of the quilt.

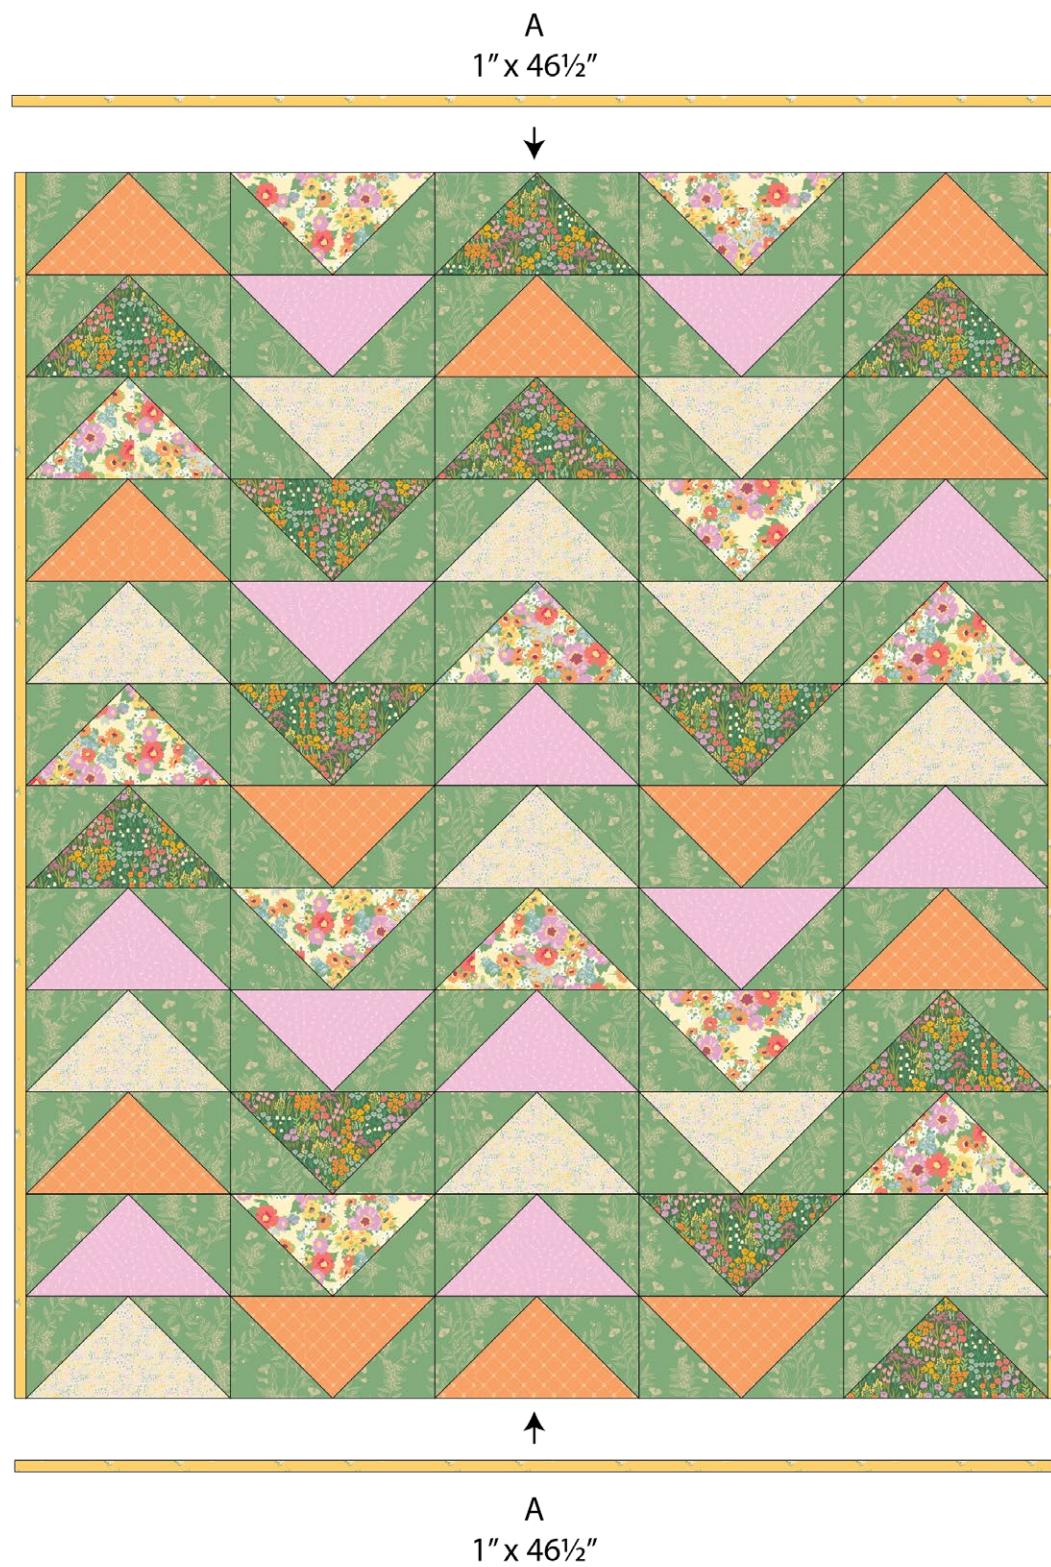


DIAGRAM 7

## TOP ASSEMBLY

- Join 2 (two) 5" x 23½" strips from Fabric **G** with one **GAG** unit, as shown in the diagram below.
- Make a total of 2 (two) of these units.

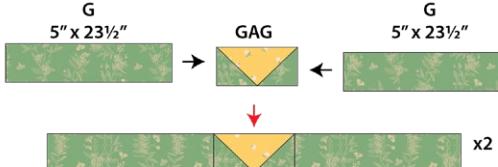


DIAGRAM 8

- Sew the strips made in the diagram above to each long side of the quilt, as shown.

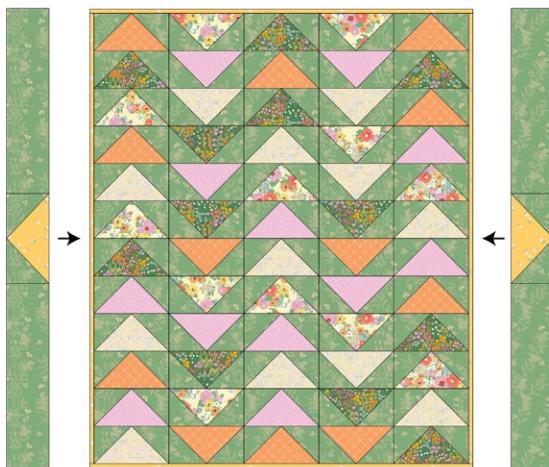


DIAGRAM 9

- Join 2 (two) 5" x 23½" strips from Fabric **G** with one **GAG** unit, as shown in the diagram below.

- Make a total of 2 (two) of these units.

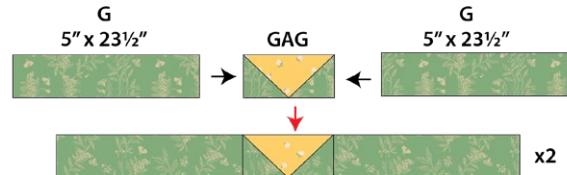


DIAGRAM 10

- Sew the strips made in the diagram above to top and bottom of the quilt, as shown, making sure all edges are matched.

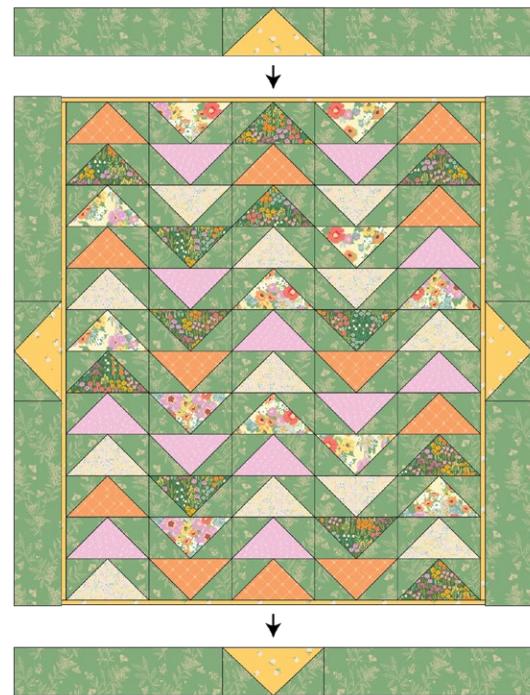


DIAGRAM 11

- See the pattern cover image for the finished quilt.

- Quilt as desired.



## QUILT ASSEMBLY

*Sew rights sides together.*

- Place BACKING FABRIC on a large surface wrong side up. Stretch it with masking tape against that surface.
- Place BATTING on top of backing fabric.
- Place TOP on top of the batting with right side facing up. Smooth away wrinkles using your hands.
- Pin all layers together and baste with basting thread, using long stitches. You can also use safety pins to join the layers.
- Machine or hand quilt starting at the center and working towards the corners. Remember that quilting motifs are a matter of personal preference. Have fun choosing yours!
- After you finished, trim excess of any fabric or batting, squaring the quilt to proceed to bind it.

## BINDING


*Sew rights sides together.*

- Sew 7 (seven)  $2\frac{1}{2}$ " strips of fabric **B** to make a long strip. Start sewing the binding strip in the middle of one of the sides of the quilt, placing the strip right side down and leaving an approximated 5" tail. Sew with  $\frac{1}{4}$ " seam allowance (using straight stitch), aligning the strip's raw edge with the quilt top's raw edge.

- Stop stitching  $\frac{1}{4}$ " before the edge of the quilt (DIAGRAM B 1). Clip the threads. Remove the quilt from under the machine presser foot. Fold the strip in a motion of  $45^\circ$  and upward, pressing with your fingers (DIAGRAM B2). Hold this fold with your finger, bring the strip down in line with the next edge, making a horizontal fold that aligns with the top edge of the quilt (DIAGRAM B3). Start sewing at  $\frac{1}{4}$ " of the border, stitching all the layers. Do the same in the four corners of the quilt.

- Stop stitching before you reach the last 5 or 6 inches. Cut the threads and remove the quilt from under the machine presser foot. Lay the loose ends of the binding flat along the quilt edge, folding the ends back on themselves where they meet. Press them together to form a crease. Using this crease as the stitching line, sew the two open ends of the binding with right sides together (you can help yourself marking with a pencil if the crease is difficult to see).

- Trim seam to  $\frac{1}{4}$ " and press open. Complete the sewing. Turn binding to back of the quilt, turn raw edge inside and stitch by hand using blind stitch.

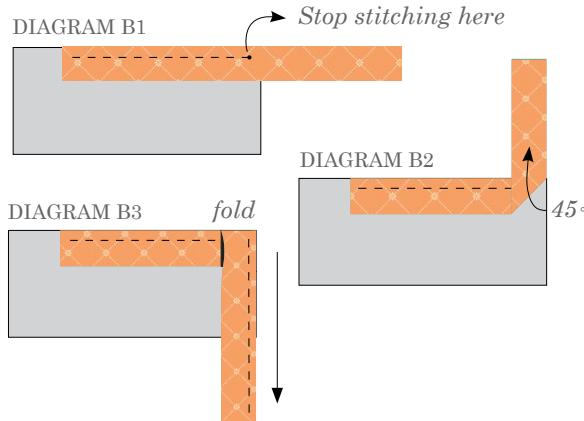

- If you are using our 2.5 edition (binding fabric), click or scan this QR code to see a tutorial on how to use this specialty fabric.



xxxxxxxxxxxxxxxxxxxx

*Congratulations  
& enjoy*



[artgalleryfabrics.com](http://artgalleryfabrics.com)

NOTE: While all possible care has been taken to ensure the accuracy of this pattern, We are not responsible for printing errors or the way in which individual work varies.

Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

© 2025 Courtesy of Art Gallery Quilts LLC. All Rights Reserved.