

COLORWASH

Woolies Flannel Quilt

67" x 79" quilt — designed by Bonnie Sullivan

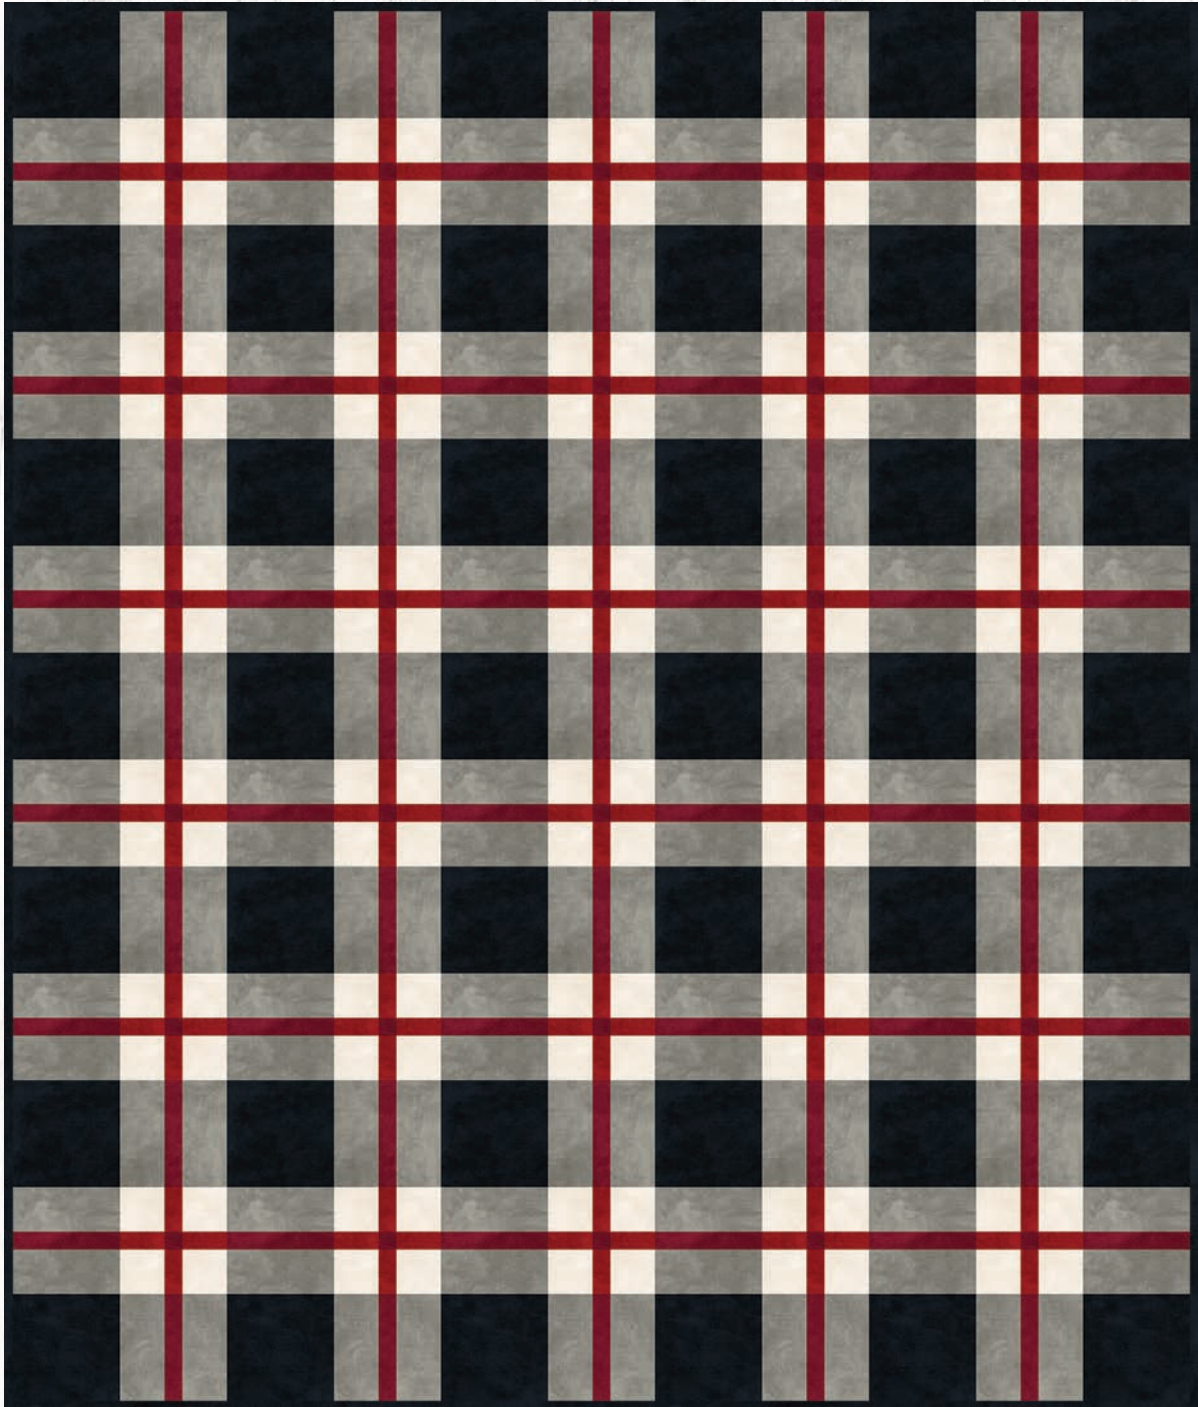

Color Wash Woolies Flannel collection by Bonnie Sullivan

MAYWOOD  STUDIO

Bonnie Sullivan's Tips for sewing with Color Wash Woolies:

Do not pre-wash your flannel. Yardages shown are for flannel that has NOT been pre-washed.

Press all seams open. This will help reduce bulk when working with flannel, especially when quilting your finished quilt.

For more from Bonnie, visit maywoodstudio.com and allthroughthenight.net

Instructions:

Strip Set 1: make 12, subcut into 71 sections

Use 24 (Fabric B) strips and 12 (Fabric E) Strips

1. Sew two 3" (Fabric B) strips to a 1½" (Fabric E) Strip. Make 12 strip sets. Cut the strip sets into 6½" sections. Make 71.



Strip Set 2: Make 12, subcut into 60 sections.

Use 10 (Fabric C) strips and 5 (Fabric D) Strips

2. Sew two 3" (Fabric C) strips to a 1½" (Fabric D) Strip. Make 12 strip sets. Cut the strip sets into 3" sections. Make 60.




Strip Set 3: Make 2, subcut into 30 sections

Use 4 (Fabric D) strips and 2 (Fabric E) Strips


3. Sew two 3" (Fabric D) strips to a 1½" (Fabric E) Strip. Make 2 strip sets. Cut the strip sets into 1½" sections. Make 30.



4. Assemble a row using 6 (Fabric A) 6½" squares and 5 (Strip Set 1) sections. Notice that the Strip Set 1 units are turned so the center makes a vertical stripe. Make 7 rows. Your rows will finish at 6½" x 67".

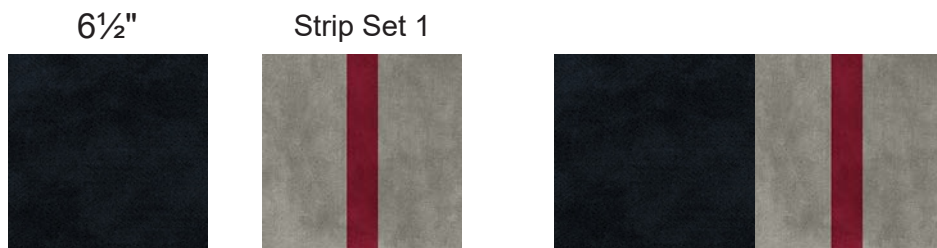

Make 7 rows

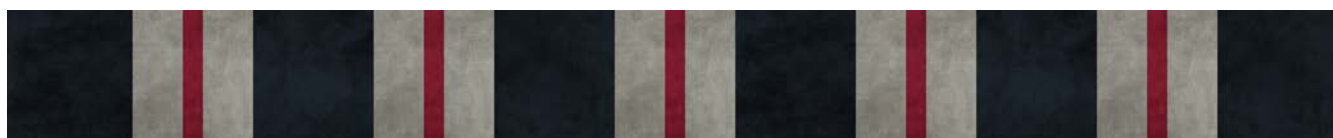

5. Using (2) Strip Sets 2 and (1) Strip Set 3, sew 30 squares together. These will finish at 6½" x 6½" each.




6. Assemble a row using 6 (Strip Set 1) units and 5 (step 5) units. Make 6 rows. Your rows will finish at 6½" x 67".



Make 6 rows





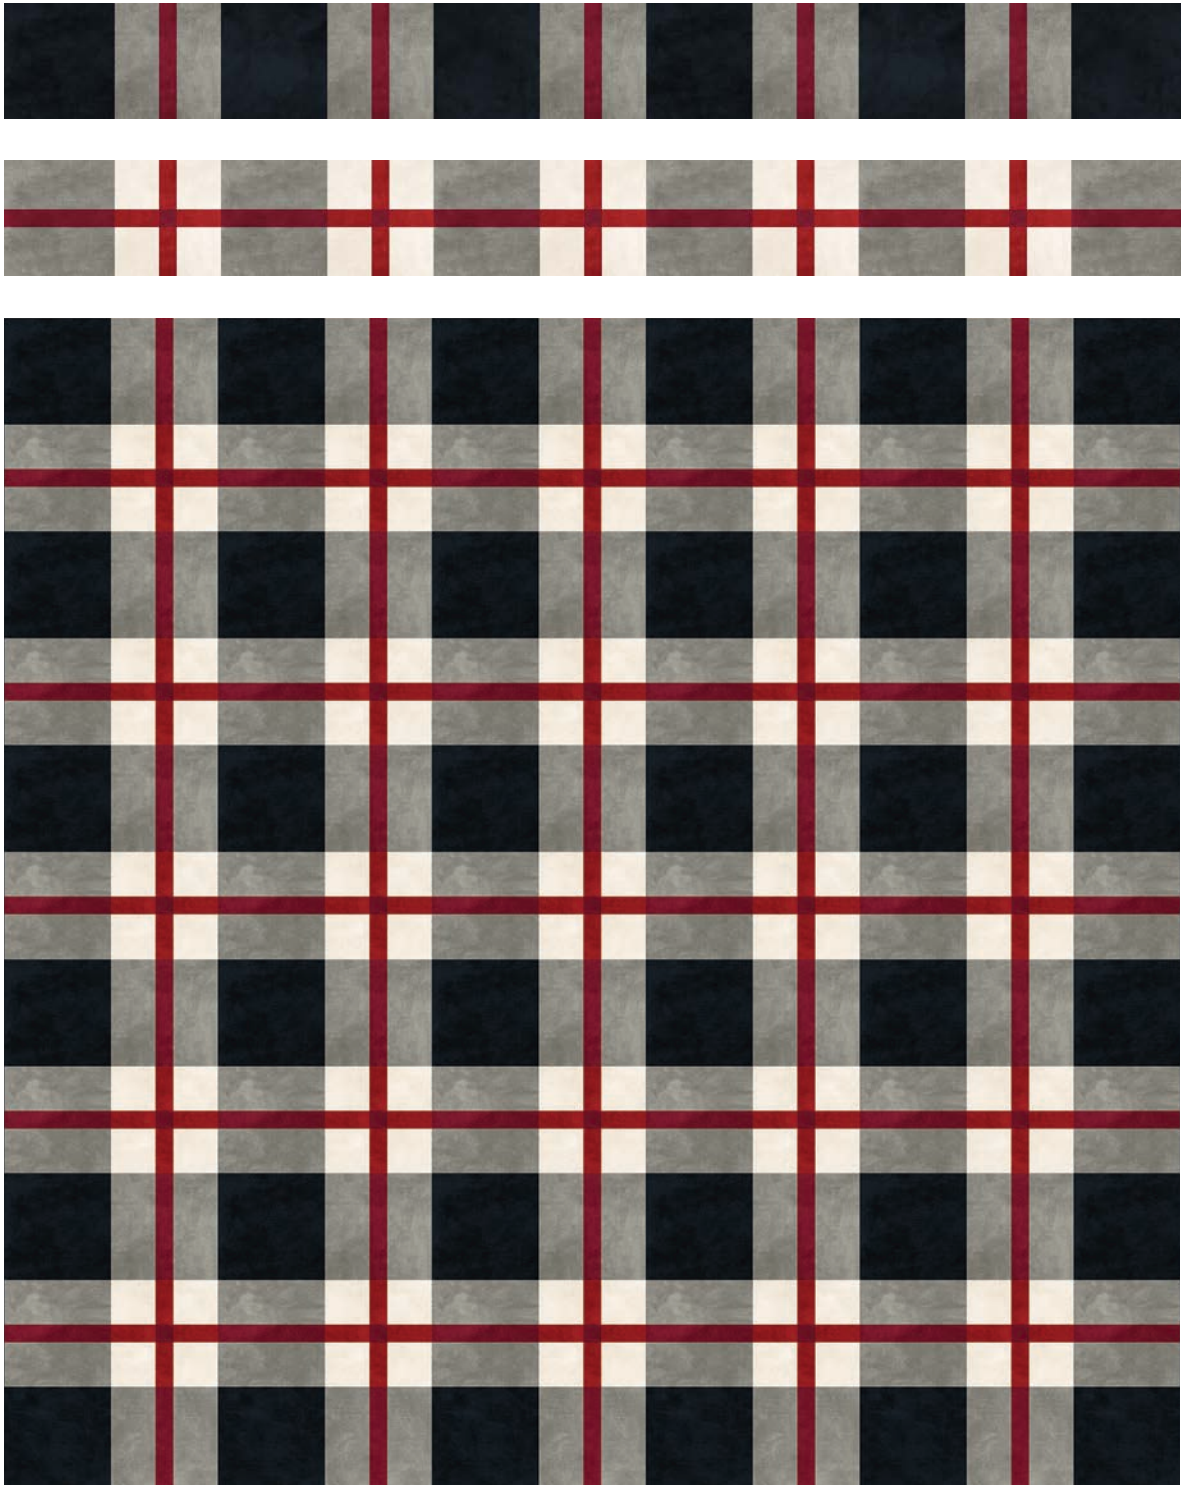



7. Sew the rows together as shown to make your quilt top. Pin carefully to match up the seams. Use a walking foot (or similar) if you have one. This will help keep the sections lined up. Press all seams open.



8. Layer the backing (wrong side up), batting and quilt top (right side up). Baste layers to secure.

9. Quilt as desired.

10. Trim the backing and batting flush with the quilt top. Bind the edges using a $\frac{3}{8}$ " seam allowance.

FABRIC		CUTTING WOF=width of fabric
	Fabric A (black) MASF9200-J 2 yds	Cut (7) 6½" x WOF strips and subcut into (42) 6½" squares Binding: Cut (8) 2½" x WOF strips
	Fabric B MASF9200-K2 (grey) 2¼ yds	Cut (24) 3" WOF strips
	Fabric C (off-white) MASF9200-E 1 yd	Cut (10) 3" WOF strips
	Fabric D (red) MASF9200-R ¾ yd	Cut (5) 1½" WOF Strips Cut (4) 3" WOF strips
	Fabric E (dk red) MASF9200-M ¾ yd	Cut (17) 1½" WOF Strips
	YOUR CHOICE Flannel Backing 4⅞ yds	