



TRAIL-TYPE STREET CROSS-SECTION
10' TRAIL IN 66' RIGHT-OF-WAY

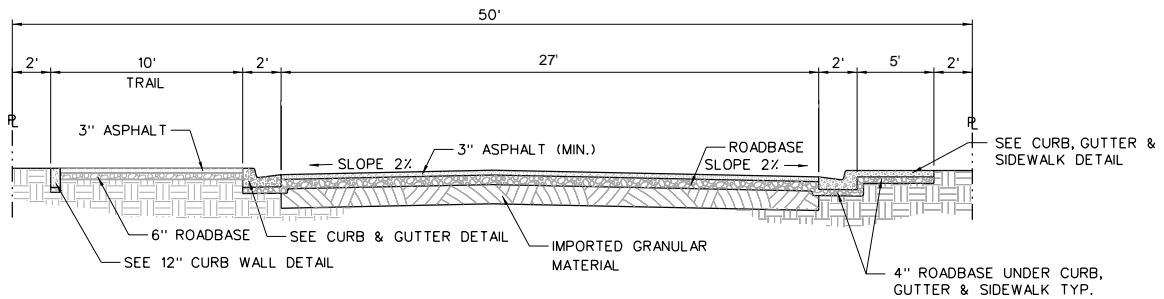

TRAIL-TYPE STREET CROSS-SECTION
10' TRAIL IN 50' RIGHT-OF-WAY

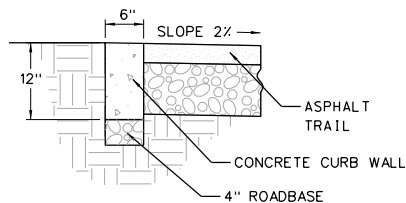

12" CURB WALL

NOTES:

1. IMPORTED GRANULAR MATERIAL (SUB-BASE), ROADBASE, AND ASPHALT THICKNESSES SHALL BE DETERMINED BY PAVEMENT DESIGN.
2. UTILITY LOCATIONS AND NOTES APPLY AS SHOWN ON STANDARD DRAWING 2a.
3. SIDEWALK NOT REQUIRED IN INDUSTRIAL ZONES WEST OF GENEVA ROAD.
4. CURB WALL - PLACE CONTRACTION JOINTS EVERY 10' MAXIMUM AND EXPANSION JOINTS EVERY 50' MAXIMUM.