

Dino-Roar Car Seat Canopy

Finished Size: 34" x 38"



Supplies Needed

- 1 Fabric Palette® Dino-Roar Flannel Fat Quarter Bundle 1 (3 - 18" x 21" pcs.)
- 1 Fabric Palette® Dino-Roar Flannel Fat Quarter Bundle 2 (3 - 18" x 21" pcs.)
- 1 Fabric Palette® Dino-Roar Flannel Fat Quarter (Green Stripe for dinosaur appliqué)
- 1 yard Flannel (for backing)
- 8 ½" x 11" Paper backed fusible web (for appliqués)
- 1 pkg. Jumbo rick rack
- 1 pkg. ¾" Hook and loop tape
- Coordinating thread
- 8" x 10" Tear-away stabilizer (optional)
- Basic sewing supplies
- Sewing machine
- Iron and pressing surface

Warning: Not intended for children's sleepwear. Do not leave child unattended while in use. For baby's safety, do not leave covered for extended periods of time.

Before you begin

Read all instructions before beginning project. Do not prewash. Before cutting, press fabrics with a dry iron. Use ¼" seam allowance and sew fabrics with right sides together (RST) unless otherwise noted. Print letters (Roar!) and Dinosaur shape on page 5.


Note: Set printer settings to actual size.

Cutting


- Fabric A - Sabertooth: 2 - 6 ½" x 14 ½"
1 - 2 ½" x 6 ½" (Roar! appliqué)
- Fabric B - Green Stripe: 2 - 6 ½" x 20 ½"
1 - 8 ½" x 10" (Dinosaur appliqué)
- Fabric C - Blue Dot: 2 - 5" x 20 ½"
2 - 5 ½" x 7 ½" (Straps)
- Fabric D - Navy Dino: 2 - 5" x 14 ½"
- Fabric E - Dino Patch: 1 - 17 ½" x 20 ½"
- Fabric F - Gray Dot: 2 - 7 ½" x 17 ½"
- Fabric G: 1 - 34 ½" x 38 ½" (Backing)
- Rick rack: 2 - 34 ½" strips
- Hook and loop tape: 2 - 2 ¼" strips

Sewing


1. Pin one short edge of a Fabric A strip to one short edge of a Fabric B strip RST; sew and press seam open to create Row 1 (Dia. A). Row should measure 6 1/2" x 34 1/2".

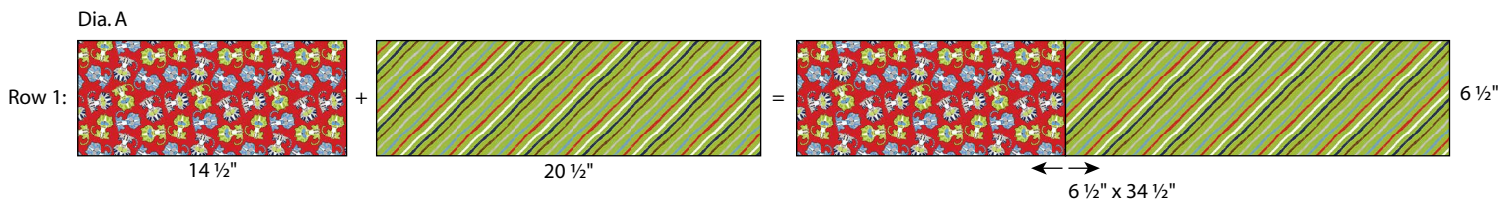


2. Follow Step 1 and refer to Diagram B to sew Rows 2 through 5. Check that finished length of all rows is 34 1/2".

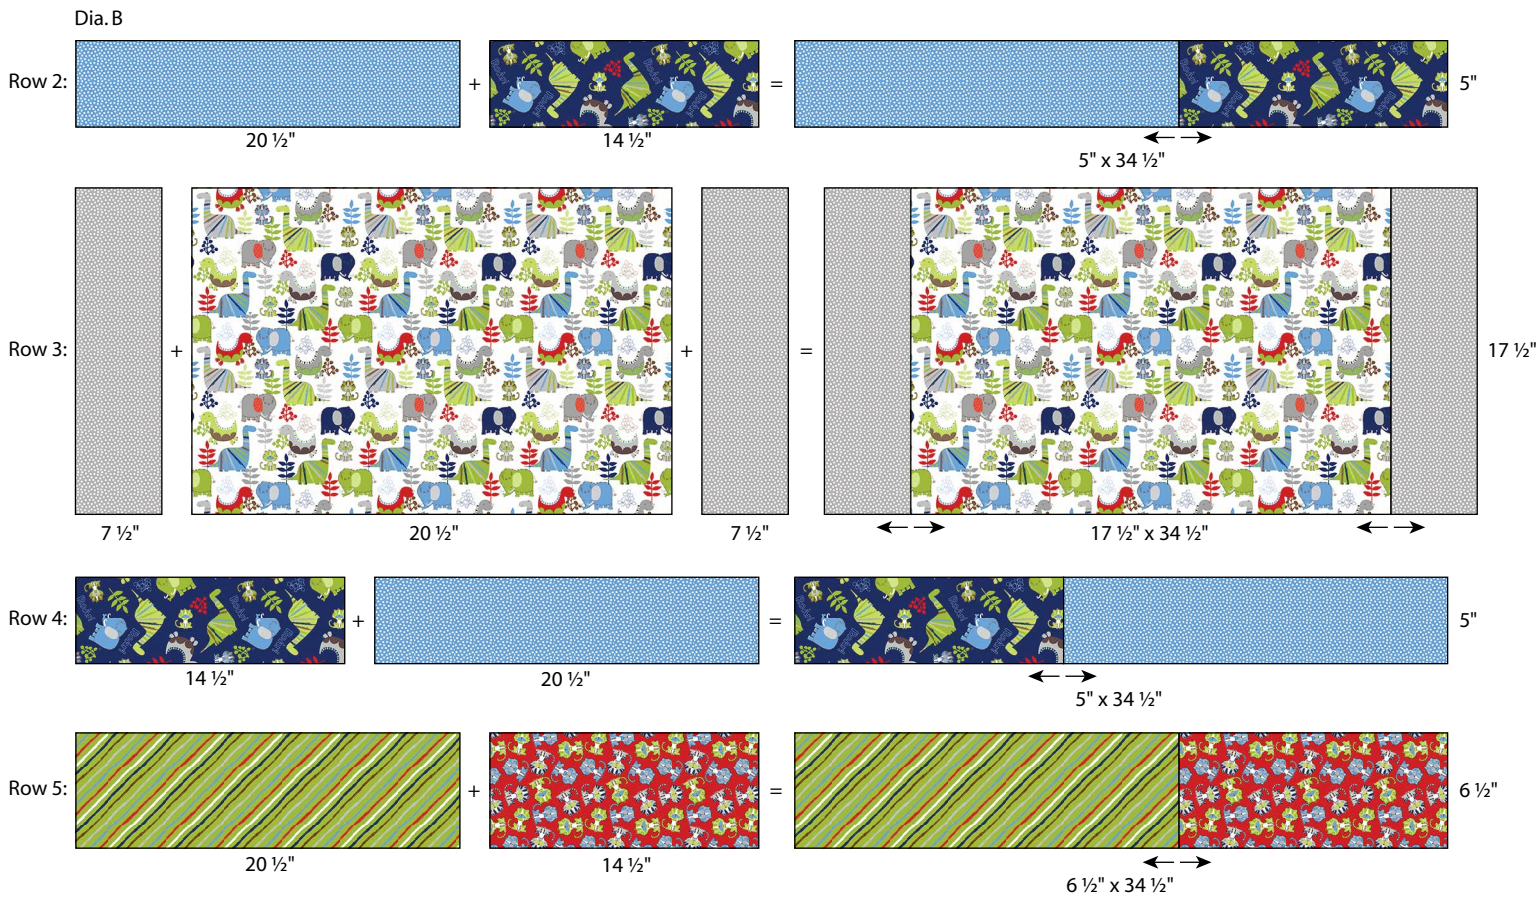


3. Refer to Diagram C to pin and sew the five rows RST; press seams open.

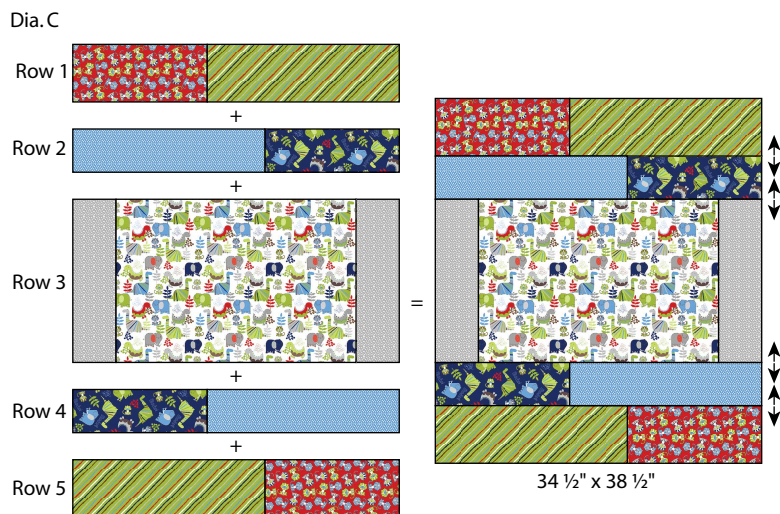


- Pin one rick rack strip over the seam between Row 2 and Row 3; sew down the center of rick rack. Pin and sew the second rick rack strip over the seam between Row 3 and Row 4 (Dia. D).
- Use the templates to trace the word Roar! and the Dinosaur shape on the paper side of the fusible web. Follow manufacturer's directions to fuse the letters to the **wrong** side of Fabric A (2 1/2" x 6 1/2") and the Dinosaur to the **wrong** side of Fabric B (8 1/2" x 10"). Cut out along traced lines and remove paper backing.

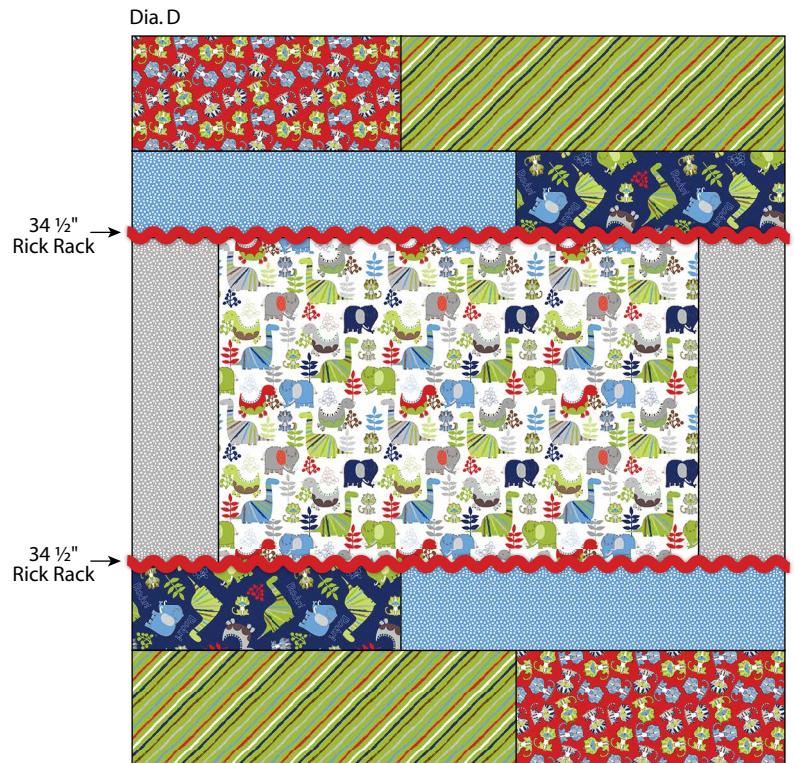


- Refer to Diagram E for placement of appliqués or place as desired; follow manufacturer's instructions to fuse in place. Sew around appliqués with a zig zag or decorative stitch to secure.
Optional: Follow manufacturer's directions to use tear-away stabilizer under appliqués.

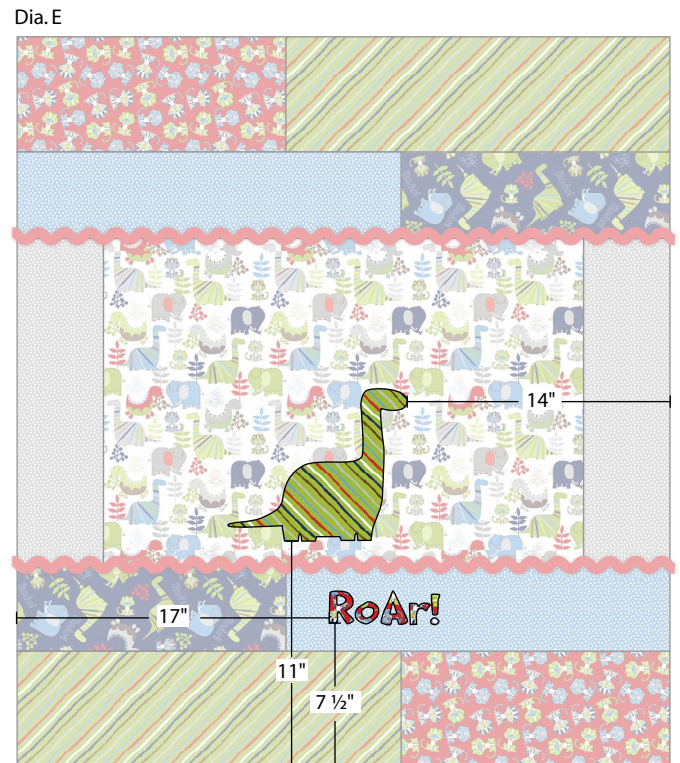

- Pin Canopy Top and Backing (Fabric G) RST with edges even; sew 1/4" around outside edges leaving an 8" opening for turning; trim corners diagonally.
- Turn right side out; press and hand stitch opening closed. Topstitch 1/4" from edge.
- Fold one Strap (Fabric C) in half RST so long edges meet. Sew 1/4" around cut edges leaving a 2" opening for turning; trim corners. Turn right side out; press and hand stitch opening closed. Topstitch 1/4" from edge (Dia. F). Repeat for second Strap.

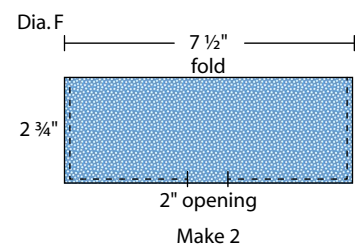


10. Pin loop (soft) side of hook and loop tape to the back at one end of the Strap; sew around edges. Pin the hook (rough) side to front at opposite end of Strap; sew around edges (Dia. G). Repeat for second Strap.

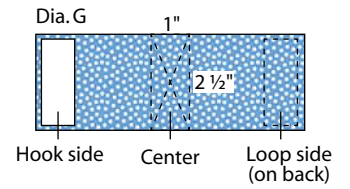

Finishing

11. Refer to Diagram H to pin Straps to Canopy top; baste and check fit on carrier. Attach Straps by sewing a 1" x 2 1/2" box where pinned. Sew an X in the middle for reinforcement.
12. Wrap Straps around baby carrier/car seat handle and secure with hook and loop tape.

Dia. H

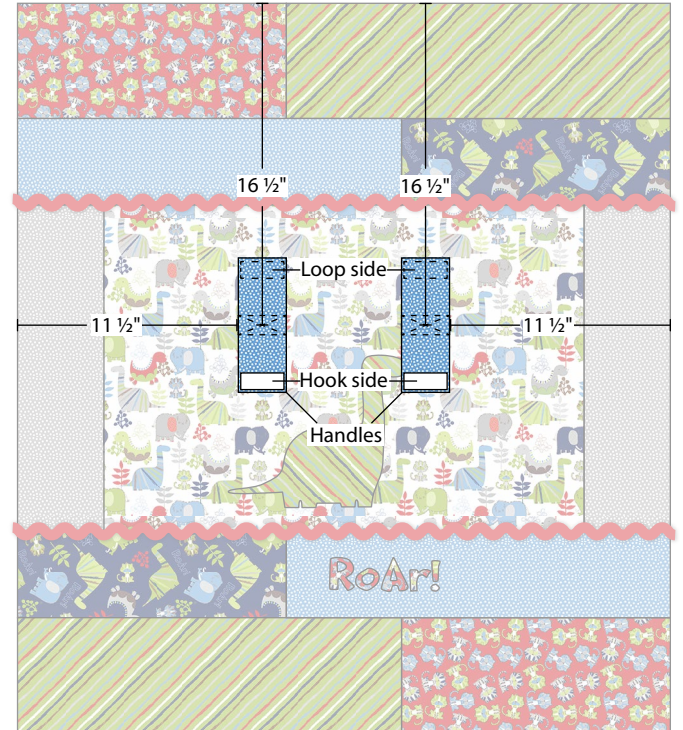

Finished Care Instructions

Machine wash cold, gentle cycle. Tumble dry low or hang to dry.

