Decorative Pillow

Finished size: 17" x 21"

Supplies Needed

- 1 pkg Fabric Central® Modern Mosaic Jellies
- Fabric Central® Modern Mosaic By-the-Yard fabrics:
 ½ yd Yellow/Black Geo
 ¼ yd Grey Texture
- 1 bag polyester fiberfill, 20 oz.
- Rotary cutter, mat, acrylic ruler
- Basic sewing supplies
- · Sewing machine
- Iron, pressing surface




Instructions

Read all instructions before beginning project. Sew all pieces together with a ¼" seam allowance and right sides together unless directed otherwise. Press seams with a dry iron on the cotton setting in the direction of arrows.

1. For pillow front, label 10 different strips (A-J) from the Jellies, and cut each strip as follows (dia. a):

Fabric A	1- 2 ½" x 2 ½" 1- 2 ½" x 10 ½"
Fabric B	1- 2 ½" x 2 ½" 1- 2 ½" x 14 ½"
Fabric C	1- 2 ½" x 2 ½" 1- 2 ½" x 10 ½"
Fabric D	1- 2 ½" x 6 ½"
Fabric E	1- 2 ½" x 6 ½"
Fabric F	1- 2 ½" x 6 ½" 1- 2 ½" x 14 ½"
Fabric G	1- 2 ½" x 6 ½" 1- 2 ½" x 14 ½"
Fabric H	1- 2 ½" x 10 ½"
Fabric I	1- 2 ½" x 10 ½"
Fabric J	1- 2 ½" x 14 ½"

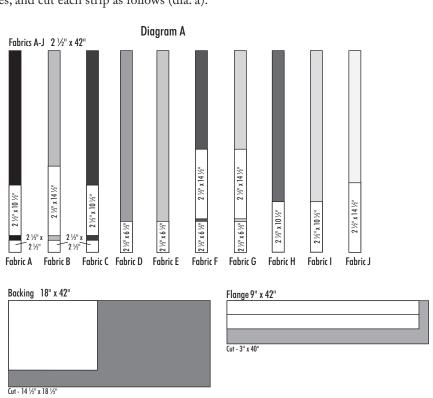

For the back of the pillow, cut the following from the $\frac{1}{2}$ yard yellow/black geo: 1-14 $\frac{1}{2}$ " x 18 $\frac{1}{2}$ " For the flange, cut the following from the $\frac{1}{4}$ yard grey texture: 2 - 3" x 40"

Project Instructions Continued

- 2. Sew the three 2 ½" squares from Fabrics A, B, and C together as shown (dia. b).
- 3. Sew the 2 ½" x 6 ½" rectangles from Fabrics D and E to the top and bottom (dia. c).
- 4. Sew the 2 ½" x 6 ½" rectangles from Fabrics F and G to the sides (dia. d).
- 5. Sew the $2\frac{1}{2}$ " x $10\frac{1}{2}$ " rectangles from Fabrics H and I to the top and bottom (dia. e).
- 6. Sew the 2 ½" x 10 ½" rectangles from Fabrics C and A to the sides (dia. f).
- 7. Sew the 2 ½" x 14 ½" rectangles from Fabrics G and F to the top and bottom (dia. g).
- 8. Sew the $2\frac{1}{2}$ " x $14\frac{1}{2}$ " rectangles from Fabrics J and B to the sides (dia. h). Pillow front should measure $14\frac{1}{2}$ " x $18\frac{1}{2}$ ".

Diagram B



Diagram C





Diagram E






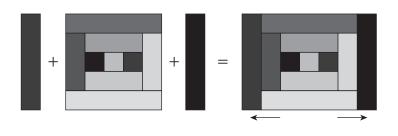


Diagram G

Diagram F




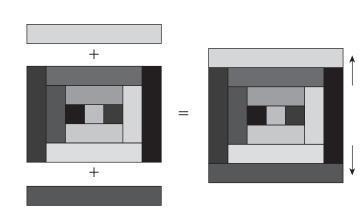


Diagram H



Project Instructions Continued

- 9. Piece the flange by sewing the 3" strips from Fabric L together on the short ends. With wrong sides together, fold in half lengthwise and press. Fold one short end over ¼" twice and sew hem close to the fold. Sew a basting stitch ¼" from the raw edge and gather slightly (dia. i).
- 10. With right side of the pillow front (made in Steps 1-8) facing up, begin at the center bottom of the pillow with the hemmed end. Place raw edges of flange even with raw edges of pillow front. Gather flange slightly to fit around pillow, especially at corners. Trim remaining short end of flange 1½" beyond hemmed end. Fold over ¼" twice, and sew hem close to fold. Flange ends will overlap about 1". If you prefer a less ruffled flange, trim a little more according to your own preference. Pin well and baste layers together along gathering stitches (dia. j).
- 11. Place the 14 ½" x 18 ½" backing right sides together with the pillow front. Pin well. Sew around the outside edges, leaving a 3"- 4" opening (dia. k). Turn right side out. Stuff with fiberfill. Sew opening closed by hand (dia. l).

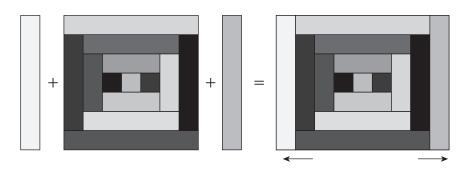