

FREE PATTERN

FLANNEL RAG QUILT 42" X 49"



A fast and fun quilt, where you quilt each block as you make it. Then, sew all the blocks together with the seams at the front of the quilt, giving a rag effect.

© 2005 Seattle Quilt Company. All Rights Reserved. Limited reproduction rights may be granted.

Fabric Requirements:

FEATURE PRINTS:

3/4 yd each of seven different coordinating flannels
This is enough fabric for the front and back of the quilt

WADDING:

Enough for forty-two 7" x 7" squares

BINDING:

This quilt has no binding

SEATTLE QUILT COMPANY

Tel: (281) 394-0438

Email: lisa@seattlequiltcompany.com

www.seattlequiltcompany.com

FSQC-RQ1



FLANNEL RAG QUILT

General Instructions:

- Use a $\frac{1}{2}$ " seam allowance
- Use a walking foot
- Sew on the RIGHT side of the fabric
- Remove selvedge edges from fabric

Cutting Instructions:


- From each of the six different flannels, cut fourteen 8" squares*
- Cut forty-two 7" squares of wadding**

*This quilt is a great way to use up scraps of flannel—you will need a total of eighty-four 8" squares of flannel.


**This quilt is also a great way to use up scraps of wadding—you will need a total of forty-two 7" squares of wadding.

Sewing Instructions:

Pair fabric squares (of the same fabric), *WRONG SIDES TOGETHER*, layered with a square of wadding centred in between each set. Match same fabrics together so the block looks the same from both sides.

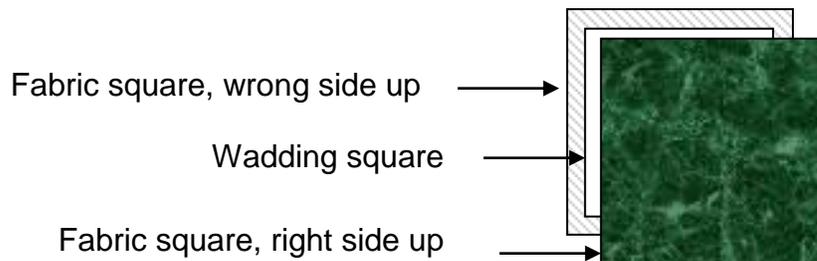

Make forty-two of these 8" square 'quilt sandwiches'. Use a walking foot and quilt an "X" corner to corner, on each of the forty-two 'quilt sandwiches'. Pre-mark if desired.




FLANNEL RAG QUILT


Quilt Assembly:

Lay the quilted blocks into seven horizontal rows of six blocks each. Once satisfied with the arrangement, stitch the horizontal rows together first. Sew the blocks with the back sides together, so the $\frac{1}{2}$ " seam allowances are on the front of the quilt.

Pin or finger press the seam allowances open.

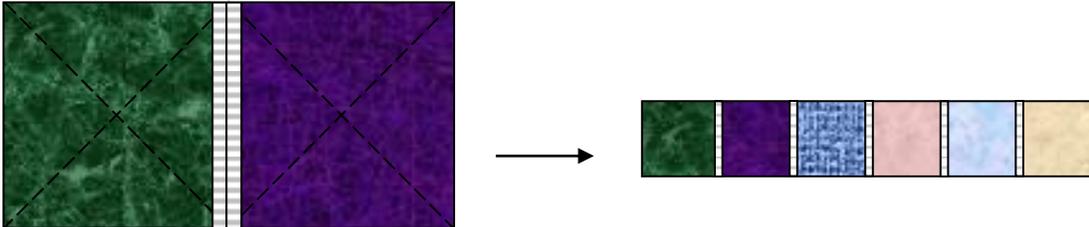

Match and sew the rows together, always keeping the $\frac{1}{2}$ " seam allowances at the front of the quilt. Once the top is assembled; sew a $\frac{1}{2}$ " seam around the outside edge of the quilt top.

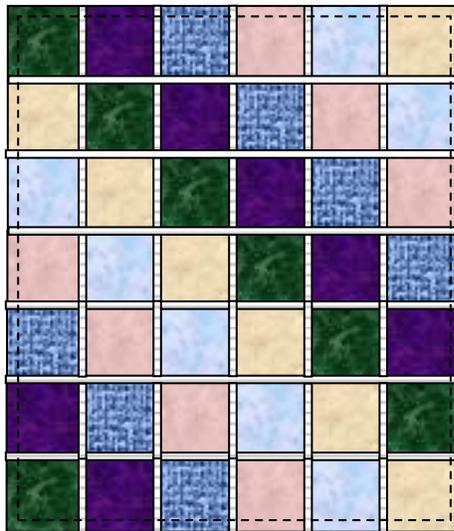

FLANNEL RAG QUILT

Fringe the blocks:

Be careful not to cut through a seam when snipping block edges.

Start on the horizontal rows first. Use a sharp pair of scissors and snip perpendicular to the seam approximately every $\frac{1}{4}$ " to $\frac{1}{2}$ ", more or less as desired.



Machine wash and tumble dry the quilt. Lay it flat to make sure all the seams did get snipped. Tidy up any messy areas where too much thread has tangled together.

Please contact us if you find an error in this pattern or have difficulty following these instructions.