



Featuring Linework and Tula Pink Solids

Collection:	Linework and Tula Pink Solids
Technique:	Pieced
Skill Level:	Advanced Beginner
Finished Size:	Finished size: approximately 65" x 81" (1.65m x 2.06m) Finished block: 10" x 10" (25.40cm x 25.40cm)

All possible care has been taken to assure the accuracy of this pattern. We are not responsible for printing errors or the manner in which individual work varies. Please read the instructions carefully before starting this project. If kitting it is recommended a sample is made to confirm accuracy.



Project designed by Stacey Day Tech edited by Alison M. Schmidt

Fabric Requirements

DESIGN	COLOR	ITEM ID	YARDAGE					
 (A) Tent Stripe (B) Pom Poms (C) Pom Poms (D) Mineral (E) Hexy Rainbow (F) Tall Tails (G) Pandamonium 	Paper Ink Paper Paper Ink Ink Ink	PWTP069.PAPER* PWTP118.INK PWTP118.PAPER PWTP148.PAPER PWTP151.INK PWTP152.INK PWTP153.INK	1½ yards (1.14m) ½ yard (0.23m) ½ yard (0.23m) ½ yard (0.30m) ⅓ yard (0.30m) ⅓ yard (0.30m) ⅓ yard (0.30m)	(A)	(B)	(C)	(D)	(E)
(H) Lemur Me Alone(I) Lil' Stinker(J) Read Between the	Ink Paper	PWTP154.INK PWTP155.PAPER	⅓ yard (0.30m) ⅓ yard (0.30m)					
Lines (K) Fairy Flakes (L) Fairy Flakes (M) Sketchy (N) Designer Essential	Paper Ink Paper Paper	PWTP156.PAPER PWTP157.INK PWTP157.PAPER PWTP158.PAPER	½ yard (0.30m) 2½ yards (2.29m) ¼ yard (0.23m) ½ yard (0.30m)	(F)	(G)	(H)	(I)	(J)
Solids (O) Designer Essential	Aegean	CSFSESS.AEGEA	½ yard (0.11m)	*	***			
Solids						773		
(P) Designer Essential	Cornflower	CSFSESS.CORNF	½ yard (0.11m)	*	*			
(P) Designer Essential Solids(Q) Designer Essential	Cosmo	CSFSESS.COSMO	½ yard (0.11m)	(K)	(L)	(M)	(N)	(O)
 (P) Designer Essential Solids (Q) Designer Essential Solids (R) Designer Essential Solids 			•	(K)	(L)	(M)	(N)	(O)
 (P) Designer Essential Solids (Q) Designer Essential Solids (R) Designer Essential Solids (S) Designer Essential Solids 	Cosmo Cricket	CSFSESS.COSMO CSFSESS.CRICK	½ yard (0.11m) ½ yard (0.11m)	(K)	(L)	(M)	(N)	(O)
 (P) Designer Essential Solids (Q) Designer Essential Solids (R) Designer Essential Solids (S) Designer Essential Solids 	Cosmo Cricket Freesia	CSFSESS.COSMO CSFSESS.CRICK CSFSESS.FREES	1/8 yard (0.11m) 1/8 yard (0.11m) 1/8 yard (0.11m)	(K)	(L)	(M)	(N) (S)	(O) (T)

⁹

continued...



Fabric Requirements

COLOR

ITEM ID

DESIGN

2-0.0			.,					
(U) Designer Essential Solids	Limeade	CSFSESS.LIMEA	¹⁄₃ yard (0.11m)					
(V) Designer Essential Solids (W) Designer Essential	Mojito	CSFSESS.MOJIT	½ yard (0.11m)					
Solids	Taffy	CSFSESS.TAFFY	½ yard (0.11m)					
(X) Designer Essential Solids	Persimmon	CSFSESS.PERSI	½ yard (0.11m)	(U)	(V)	(W)	(X)	(Y)
(Y) Designer Essential Solids	Tula	CSFSESS.TULAX	½ yard (0.11m)		Control of the second of the s			
Backing (Purchased	Separately)				7-17-17			
44" (111.76cm) wide Sketchy OR	Paper	PWTP158.PAPER	6½ yards (5.79m)	Backing 44"	Backing 108"			
108" (274.32cm) wide Sketchyer	Paper	QBTP005.PAPER	2½ yards (1.94m)	(111.76cm)	(274.32cm)			

YARDAGE

Additional Recommendations

- 100% cotton thread in colors to match
- 73" x 89" (1.85m x 2.26m) batting



Cutting

From Fabric A, cut:

- (1) $4\frac{1}{2}$ " x WOF cut
 - (3) $4 \frac{1}{2}$ " x $4 \frac{1}{2}$ ", trim the remaining strip to 3" wide and cut
 - $(4) 3" \times 4\frac{1}{2}"$
- (1) 3" x WOF; cut
 - $(4) 3" \times 9^{1/2}"$

Enough $2\frac{1}{4}$ "-wide bias strips to yield 310" of bias binding (if cutting strips from the full width of fabric, first cut a strip 27" x WOF, then cut (12) bias strips across the piece of fabric. If cutting continuous bias from a tube, start with a 31" square)

From Fabrics B, C, and L, cut:

- (1) $4\frac{1}{2}$ " x WOF; cut (3) $4\frac{1}{2}$ " x $4\frac{1}{2}$ ", (4) 3" x $4\frac{1}{2}$ "
- (1) 3" x WOF; cut (4) 3" x $9\frac{1}{2}$ "

From Fabrics D, G, and J, cut:

- (1) $4\frac{1}{2}$ " x WOF; cut
 - (3) $4\frac{1}{2}$ " x $4\frac{1}{2}$ " and (6) 3" x $4\frac{1}{2}$ "
- (2) 3" x WOF; cut (6) 3" x $9^{1/2}$ "

From Fabric E, cut:

- (6) 3" x LOF, cut
 - (6) $3'' \times 9^{1/2}''$
- (3) $4\frac{1}{2}$ " x LOF, cut
 - (6) $4\frac{1}{2}$ " x 3" and (3) $4\frac{1}{2}$ " x $4\frac{1}{2}$

From Fabric F cut:

- (1) $4\frac{1}{2}$ " x WOF; cut
 - (2) $4\frac{1}{2}$ " x $4\frac{1}{2}$ ", trim the remaining strip to
 - 3" wide and cut (6) 3" $\times 4^{1/2}$ "
- (2) 3" x WOF; cut

Copyright[©] 2020

(6) $3'' \times 9^{1/2}''$

From Fabrics H, I, and M, cut:

- (1) $4\frac{1}{2}$ " x WOF; cut
 - (2) $4\frac{1}{2}$ " x $4\frac{1}{2}$ ", (6) 3" x $4\frac{1}{2}$ "
- (2) 3" x WOF; cut
 - (6) $3'' \times 9^{1/2}''$

From Fabric K, cut:

- (2) $15\frac{1}{2}$ " x WOF; cut
 - (4) $15\frac{1}{2}$ " x $15\frac{1}{2}$ " squares, subcut on both diagonals into (16) side setting triangles (2 will be extra), and (2) 8" x 8" squares, subcut on one diagonal into (4) corner triangles
- (33) $1\frac{1}{2}$ " x WOF; set aside 19 strips and then subcut (40) $1\frac{1}{2}$ " x $10\frac{1}{2}$ " block sashing strips

From Fabrics N, O, P, T, U, V, W, and Y, cut:

- (4) 1" x WOF; cut
 - (6) 1" \times 10½", (6) 1" \times 9½"

From Fabrics Q, R, S, and X, cut:

- (3) 1" x WOF; cut
 - (4) 1" x $10\frac{1}{2}$ ", (4) 1" x $9\frac{1}{2}$ "



Instructions

Use a $\frac{1}{4}$ " seam allowance. Sew with fabrics right sides together and press as directed after each seam.

Block Construction

- 1. Using the table below for fabric groupings, sew (2) 3" x $4\frac{1}{2}$ " rectangles to the sides of the $4\frac{1}{2}$ " square. Press away from the center square, then sew the matching 3" x $9\frac{1}{2}$ " rectangles to the top and bottom. Press away from the center.
- 2. Sew the 1" \times 9½" rectangles to the sides of the unit and press open. Sew the matching 1" \times 10½" rectangles to the top and bottom of the unit and press open to complete the block. Label each block with its Block Number. (**Fig. 1** on page 6)

Block #	4 ¹ / ₂ " x 4 ¹ / ₂ "	3" x 9½" 3" x 4½"	1" x 9½" 1" x 10½"	Make:
1	Fabric A	Fabric I	Fabric N	3
2	Fabric B	Fabric M	Fabric O	3
3	Fabric C	Fabric H	Fabric V	3
4	Fabric D	Fabric G	Fabric U	3
5	Fabric E	Fabric J	Fabric Y	3
6	Fabric J	Fabric E	Fabric X	3
7	Fabric H	Fabric C	Fabric Q	2
8	Fabric G	Fabric D	Fabric T	3
9	Fabric I	Fabric A	Fabric S	2
10	Fabric F	Fabric L	Fabric X	2
11	Fabric L	Fabric F	Fabric P	3
12	Fabric M	Fabric B	Fabric R	2

Quilt Top Assembly


- 3. Refer to the **Quilt Layout** diagram (page 7) to arrange the blocks into 8 rows as shown. Sew the blocks together into diagonal rows with a **Fabric K** 1½" x 10½" block sashing strip between each block and at the beginning and end of the block rows. Add the side and 2 corner **Fabric K** triangles to the block rows. Press towards the sashing for all.
- **4.** Sew the **Fabric K** 1½" x WOF strips together end-to-end. Measure each block row, referring to the **Quilt Layout** diagram for placement, and cut a total of 9 sashing strips to fit. They should be: (2) 12½" long, (2) 34½" long, (2) 56½" long, (2) 78½" long, and (1) 89½" long.
- **5.** Sew the rows together with the $1\frac{1}{2}$ " sashing strips between them. Press towards the sashing. Add the two remaining **Fabric K** corner triangles. Trim the perimeter of the quilt top to square up.
- **6.** Measure the quilt top vertically through the center and cut 2 side borders trips to fit from the remaining continuous 1½"-wide **Fabric K** strip. They should be 78¼" long. Sew them to the sides of the quilt top, matching ends and centers. Press towards the border.
- **7.** Repeat Step 6 to measure the quilt top horizontally, cut and add top & bottom **Fabric K** borders. They should be 64³/₄" long. Press towards the border.

Finishing

- **8.** Sew together the $2\frac{1}{2}$ " x WOF bias-cut **Fabric A** binding strips end-to-end using diagonal seams. Press the seams open. Press the binding strip in half wrong sides together.
- **9.** Layer the backing (wrong side up), batting, and quilt top (right side up). Baste the layers together and quilt as desired. Trim excess batting and backing even with the quilt top after quilting is completed.
- 10. Leaving an 8" tail of binding, sew binding to top of quilt through all layers matching all raw edges. Miter corners. Stop approximately 12" from where you started. Lay both loose ends of binding flat along quilt edge. Where these two loose ends meet, fold them back on themselves and press to form a crease. Using this crease as your stitching line, sew the two open ends of the binding together right sides together. Trim seam to ¼" and press open. Finish sewing binding to quilt.
- 11. Turn the binding to the back of the quilt and hand stitch in place.



Fig. 1

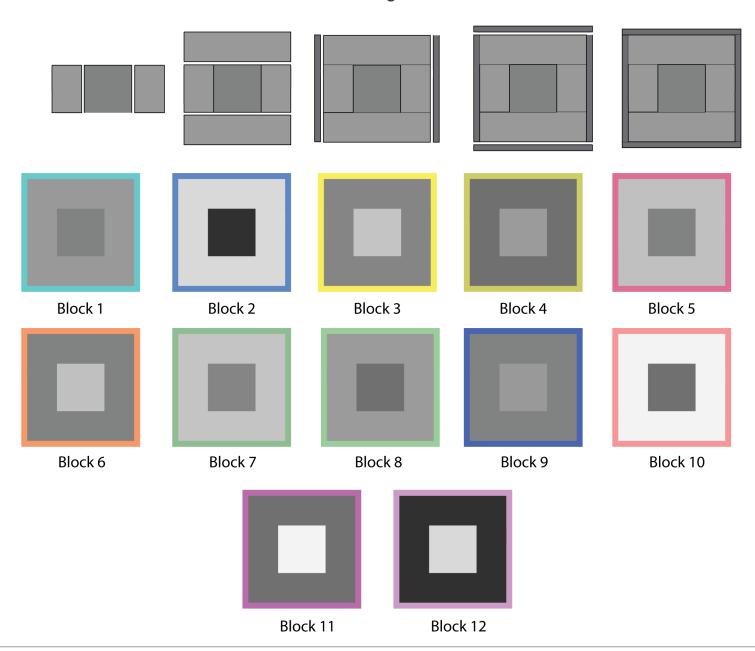



Quilt Layout

