


# YELLOWSTONE PANEL QUILT

Riley Blake  
DESIGNS

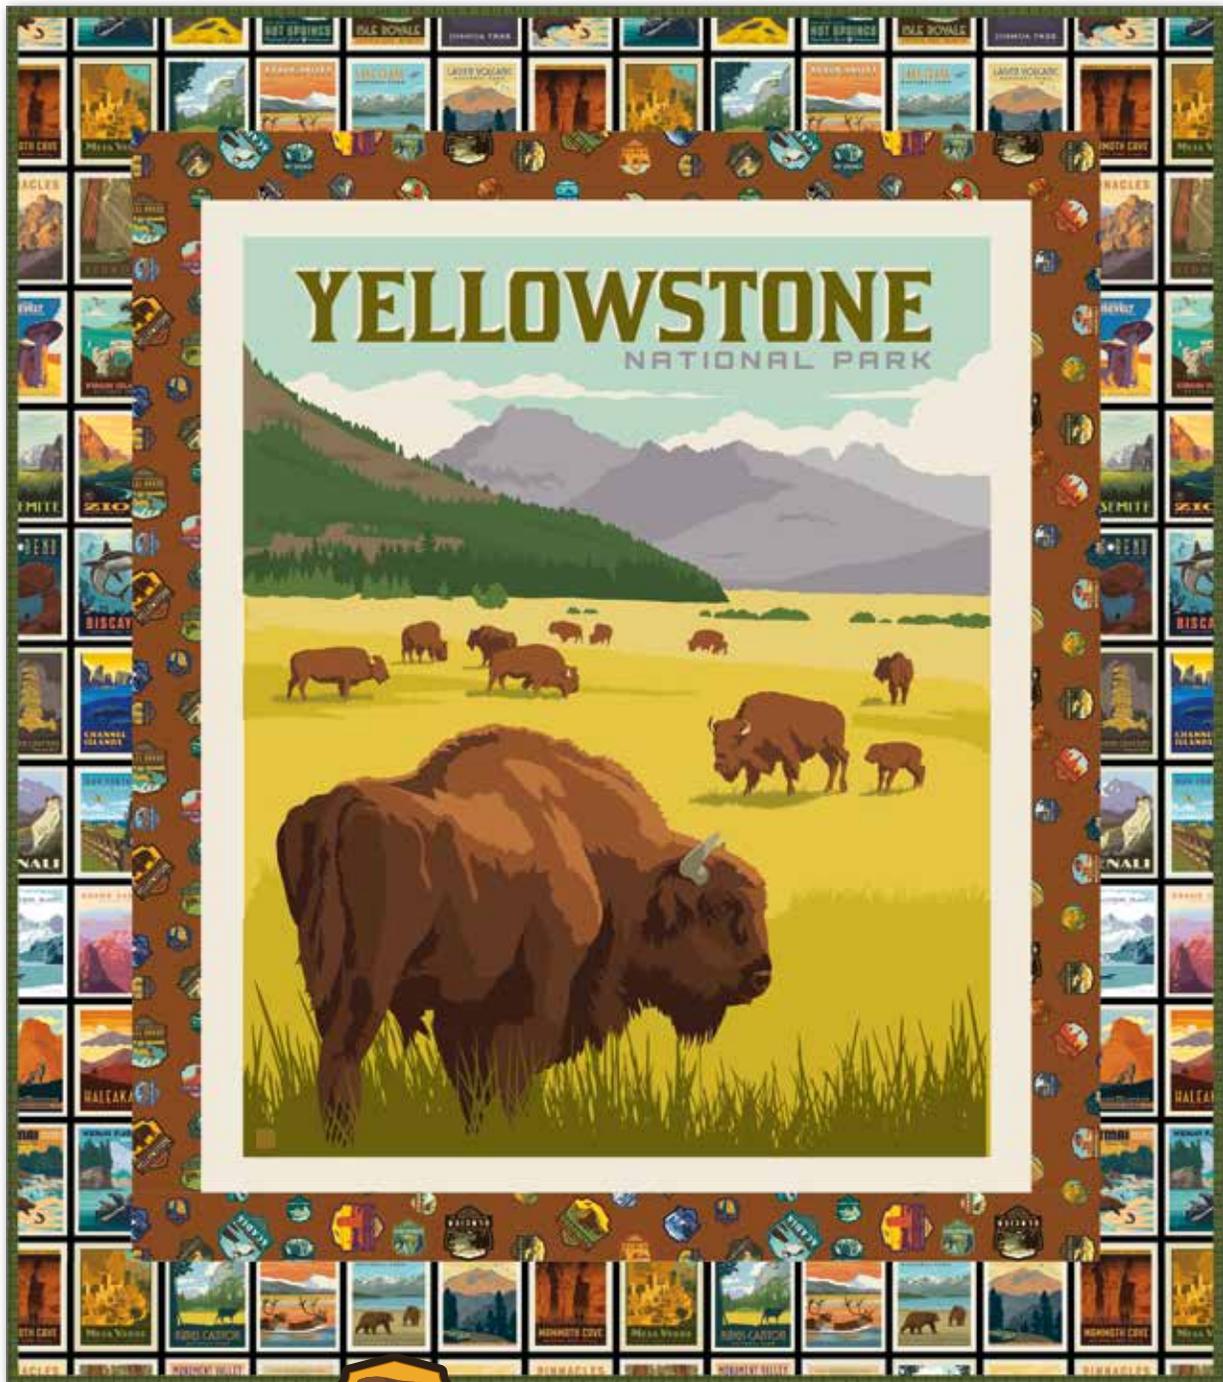

© 2019 Anderson Design Group

# YELLOWSTONE PANEL QUILT

## FINISHED QUILT SIZE 51" x 59"

Measurements include  $\frac{1}{4}$ " seam allowance.

Sew with right sides together unless otherwise stated.

## CUTTING REQUIREMENTS

Please read instructions before cutting fabrics. Refer to the quilt photo for the placement of each of the fabrics included in the kit. Use a straight edge ruler and rotary cutter to cut your fabrics.

## PANEL

The panel needs to measure  $35\frac{1}{2}$ " wide x  $43\frac{1}{2}$ " high. If your panel is slightly larger than this, do not trim off the entire difference from only one side of the panel. In order to make sure that the image in the panel remains centered, you may need to trim a little bit from both sides of the panel. This is also true if the height of the panel measures larger than  $43\frac{1}{2}$ ".

## INSIDE BORDER FABRIC

Cut four strips that measure  $2\frac{1}{2}$ " x  $43\frac{1}{2}$ " (the width of the fabric).

## OUTER BORDER FABRIC

Cut five strips that measure  $5\frac{1}{2}$ " x  $43\frac{1}{2}$ " (the width of the fabric).

## QUILT ASSEMBLY

### INNER BORDERS

Sew a  $2\frac{1}{2}$ " x  $43\frac{1}{2}$ " strip of inner border fabric to the right side of the panel. Press the seam allowance towards the panel. If the strip is longer than needed, trim it even with the edges of the panel. Sew another  $2\frac{1}{2}$ " x  $43\frac{1}{2}$ " to the left side of the panel and press the seam allowance towards the panel. If the strip is longer than needed, trim it even with edges of the panel.

Next, sew a  $2\frac{1}{2}$ " x  $43\frac{1}{2}$ " strip of the inner border fabric to the top of your panel. Press the seam allowance with a warm iron towards the panel. Sew another  $2\frac{1}{2}$ " x  $43\frac{1}{2}$ " of the inner border fabric to the bottom of panel. Press the allowance with a warm iron towards the panel. If strips are longer than needed, trim them even with the edges of the other inner borders.

## OUTER BORDERS

Sew the strips cut for the outer border together end to end, to create one long  $5\frac{1}{2}$ " strip. From this long strip, cut two strips to measure  $47\frac{1}{2}$ " and cut two strips to measure  $51\frac{1}{2}$ ".

Sew a  $5\frac{1}{2}$ " x  $47\frac{1}{2}$ " strip of outer border fabric to the right side. Press the seam allowance with a warm iron towards the outer border. Next, sew the other  $5\frac{1}{2}$ " x  $47\frac{1}{2}$ " strip of outer border fabric to the left side. Press the seam allowance with a warm iron towards the outer border. If the strips are longer than needed, trim them even with the edges of the inner border.

Sew a  $5\frac{1}{2}$ " x  $51\frac{1}{2}$ " strip to the top, and sew the other  $5\frac{1}{2}$ " x  $51\frac{1}{2}$ " strip to the bottom. Press the seam allowances with a warm iron towards the outer border. If the strips are longer than needed, trim them even with the edges of each side outer border.

Your quilt top is now completed. For ideas and tips to finish the quilt, please visit <https://www.youtube.com/user/RileyBlakeDesigns>

