

# Pillow Case

## Fabric Requirements:

Main Fabric – ¾ yd

Cuff – ¼ yd

Accent strip – 1/8 yd

## Cutting:

Main Fabric

- Cut 27" x width of fabric (Do NOT remove selvage at this point.)

Cuff Fabric

- Cut 9" x width of fabric (Do NOT remove selvage at this point.)

Accent fabric

- Cut 2 ½" x width of fabric (Do NOT remove selvage at this point.) Fold in half lengthwise and press with wrong sides together.

## Construction:

Layer Fabrics in this order:

1. Cuff fabric, right side up
2. Main fabric, right side up. If you have directional fabric, the top of the directional should be lined up at the top of the cuff to be sewn.
3. Accent piece, raw edge even with the last two layers.

\*\*At this point you may want to baste the three pieces together with a scant ¼" seam across the top of all three pieces, being careful that all raw edges are evenly aligned.\*\*

Roll up the main piece of fabric to the bottom of your folded accent strip. Be careful not to let this get near the seam.

Bring up the bottom edge of the cuff fabric and lay it on top of the other layers to be sewn.

Carefully pin all your raw edges together, being careful not to catch any extra fabric from the middle.

Sew across the top seam using a ¼" seam.

Pull the main fabric out of the tube and press.


Fold the pillowcase in half, wrong sides together with the cuff at the top. Trim selvages on the side, and sew a ¼" seam down the side and bottom.

Clip corners and turn inside out. Press seam.

With right sides together, sew a 3/8" seam down the side and across the bottom. This creates a French seam.

Turn right side out, and press to finish!

©Thimble Towne 2017

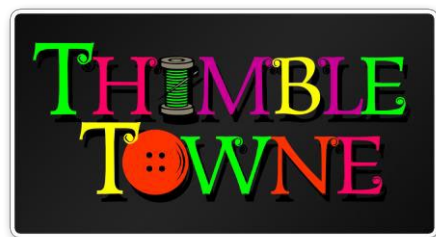

400 West Caldwell, Suite F  
Visalia, CA 93277  
Ph: (559) 627-5778

2841 Unicorn Rd #103  
Bakersfield, CA 93308  
Ph: (661) 399-5778