

# Quilted Key Fob

## Supplies:

Fabric: 1 - 2½" x 5" 3 - 1½" x 2½" fabrics

Batting 2" x 3½"


Key Fob Hardware Set

Magnetic snap & Stabilizer (Optional)

Pliers


**Note:** For a heavier key fob use 2 or more pieces of batting or add stabilizer to both sides of the batting.

1. With right sides together center two 1½" x 3½" fabric pieces on top of the batting.
2. Stitch a ¼" from one long edge.


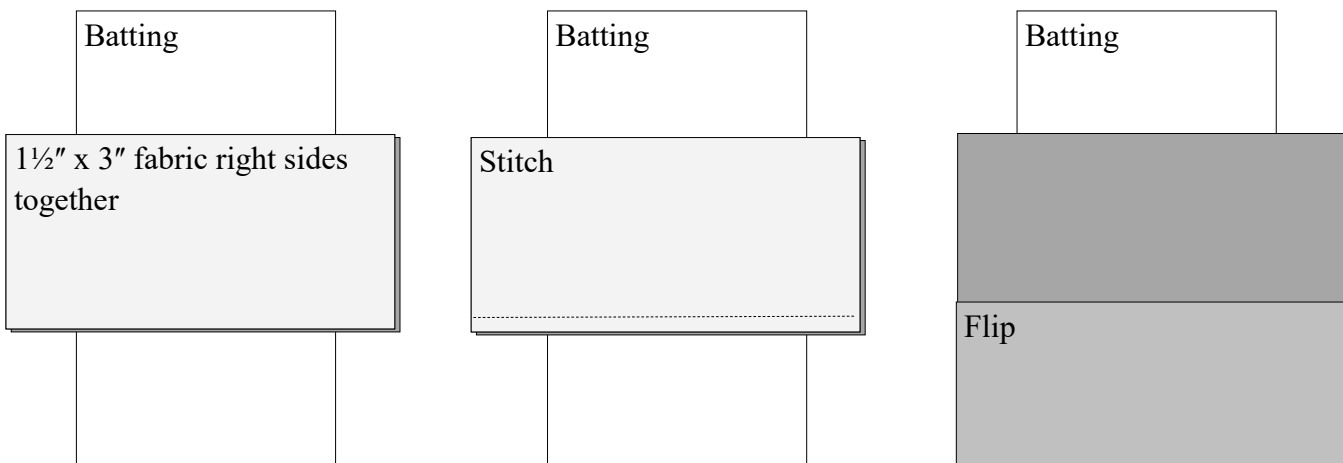


3. Flip fabric open and press.
4. Center the remaining 1½" x 3½" fabric piece right sides together with the center fabric. Stitch, flip and press. Attach optional magnetic snap closer now. See instructions on page 2.
5. Layer the quilted piece right sides together with the 2½" x 5" fabric. Draw stitching lines as shown.


Note the side stitching lines don't go through the batting.

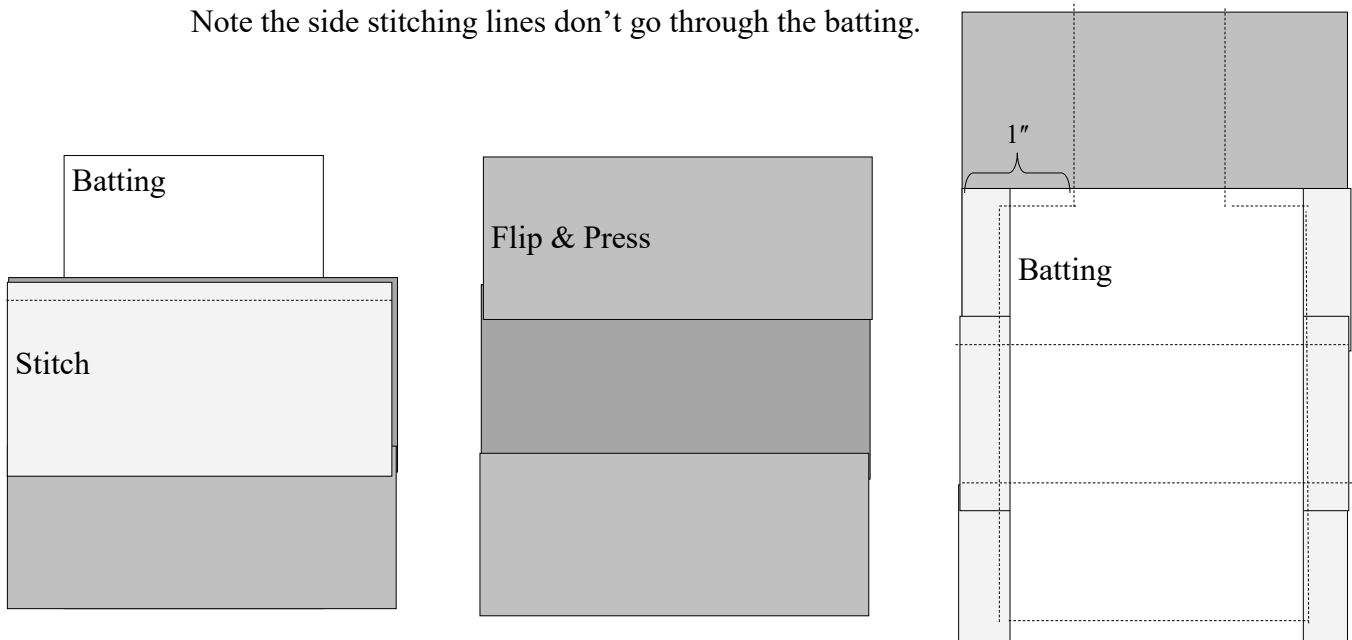

6. Trim excess fabric and clip shown.
7. Place the eraser end of a pencil on the bottom seam and slowly work the key fob right sides out. Press
8. Fold top raw edge over twice to cover the raw edge of the pieced side. Leave a 1/2" of fabric for the key fob hardware. Press and topstitch in place.
9. Attach key fob hardware according to manufactures instructions.

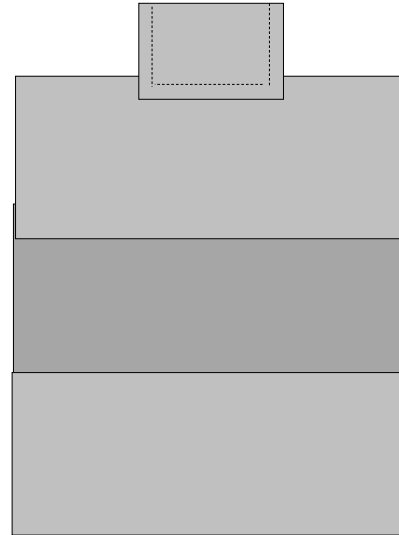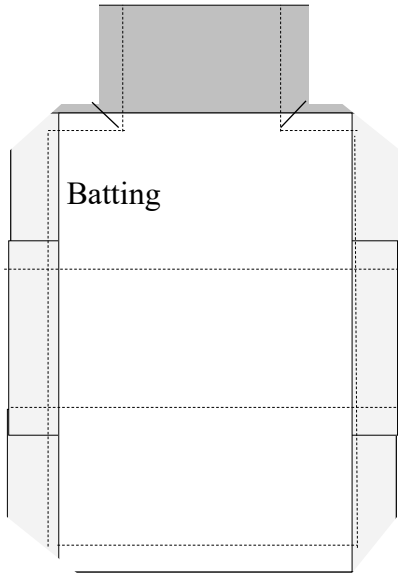


If you don't have key fob hardware. A split ring can be used by creating a loop with the extra fabric on top. Instead of topstitching secure with a row of stitching on the lower edge only.

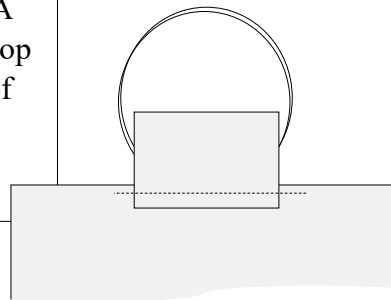

#### Optional Snap Placement Guide

To add the magnetic snap fuse a 1" square of fusible stabilizer to the wrong side of the 2 1/2" x 5" fabric piece. Attach snap according to manufactures instructions.



#### Additional Designs

