

FINISHED QUILT SIZE 57" x 68"

FINISHED BLOCK SIZE 10" x 10"



Designed by: Wendy Sheppard

Nancy A. Fullenwider



Finished Quilt Size: 57" x 68"
Finished Block Size: 10" x 10"

FABRIC REQUIREMENTS

	Fabric A 27697 J $\frac{2}{3}$ YARD 1 BOLT		Fabric B 27698 K $\frac{5}{8}$ YARD 1 BOLT		Fabric C 27699 K 1 $\frac{1}{8}$ YARDS 1 BOLT		Fabric D 27700 ZK 1 $\frac{1}{4}$ YARDS* 1 BOLT
	Fabric E 27701 J $\frac{7}{8}$ YARD 1 BOLT		Fabric F 27702 Z $\frac{5}{8}$ YARD 1 BOLT		Fabric G 24776 K $\frac{5}{8}$ YARD 1 BOLT		Fabric H 22083 Z $\frac{3}{8}$ YARD 1 BOLT
	Suggested Backing (option 1: non-directional) 27701 K 3 $\frac{3}{4}$ YARDS** 3 BOLTS		Suggested Backing (option 2: directional) 27698 K 4 $\frac{1}{3}$ YARDS** 4 BOLTS	* includes Binding ** Suggested backing fabric. Not supplied with kits.			

Information within gray box = Number of Bolts or Packs needed to make 12 Kits

We recommend that you carefully read through all instructions before starting your project.

CUTTING

WOF = width of fabric from selvage to selvage.
LOF = length of fabric, parallel to the selvage edges.
Label pieces with the fabric letter. Remove as little as possible when trimming selvages from WOF strips.

Fabric A, cut:

- (8) 8½" squares, centering each design.

Fabric B, cut:

- (2) 8½" x WOF strips.
Subcut into (7) 8½" squares.

Fabric C, cut:

- (4) 3½" x LOF strips from 1 edge of yardage for side borders.
- (5) 3½" x remaining WOF strips for top and bottom borders.
- (2) 8½" x remaining WOF strips.
Subcut into (5) 8½" squares.

Fabric D, cut:

- (2) 8½" x WOF strips.
Subcut into (20) 2½" x 8½" rectangles and (20) 2½" squares.
- (7) 2¼" x WOF binding strips.

Fabric E, cut:

- (4) 1½" x WOF strips.
Subcut into (15) 1½" x 10½" rectangles for sashing strips.
- (5) 1½" x WOF strips for sashing rows.
- (5) 1½" x WOF strips for border.

Fabric F, cut:

- (6) 2½" x WOF strips for border.

Fabric G, cut:

- (6) 2½" x WOF strips.
Subcut into (20) 2½" x 8½" rectangles and (20) 2½" squares.

Fabric H, cut:

- (6) 1½" x WOF strips for border.

Backing, cut:

Option 1: non-directional

- (2) 65" x WOF pieces.

OR Option 2: directional


- (2) 76" x WOF pieces.

ATTIC WINDOW BLOCKS

Use a ¼" seam allowance for all stitching.

1. Draw a diagonal line from corner to corner on the wrong side of each **Fabric G** square.

2. Place a marked square right sides together with a **Fabric D** square, placing the **Fabric D** square and the marked line as shown. Sew on the line. Trim seam allowance ¼" below the stitching. Press the **Fabric G** triangle down to complete (1) 2½" x 2½" triangle unit. Repeat to make 20 triangle units.

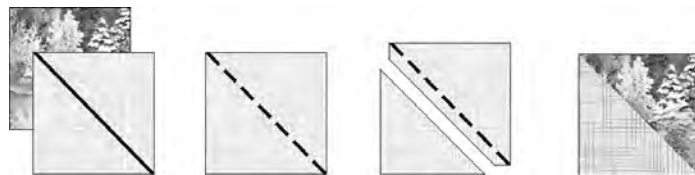

Triangle Unit — Make 20

3. Sew a **Fabric D** rectangle to the right edge of a **Fabric A** square. Press seam toward the rectangle. Stitch a triangle unit to 1 end of a **Fabric G** rectangle. Press seam toward the rectangle. Join the pieced sections to complete (1) 10½" x 10½" Attic Window block. Press seam toward the top section.



Attic Window Block — Make 20

4. Repeat step 3 to make a total of 20 blocks using all **Fabrics A, B and C** 8½" squares.

QUILT ASSEMBLY

Refer to this exploded quilt diagram as needed throughout the following steps.



1. Sew 4 blocks together with (3) $1\frac{1}{2}$ " x $10\frac{1}{2}$ " **Fabric E** sashing strips to make a $10\frac{1}{2}$ " x $43\frac{1}{2}$ " block row. Press seams toward the sashing strips. Repeat to make a total of 5 rows.
2. Stitch (5) $1\frac{1}{2}$ " x WOF **Fabric E** strips short ends together. Press seams to 1 side. Cut into (4) $43\frac{1}{2}$ " sashing rows.
3. Sew the block rows and sashing rows alternately together to make the $43\frac{1}{2}$ " x $54\frac{1}{2}$ " quilt center. Press seams toward the sashing rows.
4. Repeat step 2 with (5) $1\frac{1}{2}$ " x WOF **Fabric E** strips, cutting 2 each $54\frac{1}{2}$ " and $45\frac{1}{2}$ " strips. Stitch the longer strips to the long sides of the quilt center and the shorter strips to the top and bottom. Press seams toward the strips.

5. Repeat step 4 with **Fabric F** strips, cutting 2 each $56\frac{1}{2}$ " and $49\frac{1}{2}$ " strips.

6. Repeat with **Fabric H** strips, cutting 2 each $60\frac{1}{2}$ " and $51\frac{1}{2}$ " strips.

7. Sew (2) $3\frac{1}{2}$ " x LOF **Fabric C** strips together and trim to $62\frac{1}{2}$ ". Repeat with the 2 remaining LOF strips. Stitch to the long sides of the quilt center. Press seams toward the strips.

8. Stitch (5) $3\frac{1}{2}$ " x remaining WOF **Fabric C** strips together. Cut into (2) $57\frac{1}{2}$ " strips. Sew to the top and bottom to complete the top. Press seams toward the strips.

FINISHING

1. Remove the selvage edges from the backing pieces. Sew the pieces together on the long edges with a $\frac{1}{2}$ " seam allowance. Press seam open. Trim to make the 65 " x 76 " backing piece.
2. Layer the backing, a 65 " x 76 " batting piece and the top. Pin or baste to hold.
3. Quilt as desired. Trim batting and backing even with the top.
4. Make double-fold binding using the **Fabric D** binding strips. Bind the edges of the quilt using your preferred method to complete the quilt.

While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.