



## NON-SLIP 12" Wave Ruler

Add a quick curve to any traditional or paper-pieced block measuring 12" in width and 3-1/2" or greater in length.

**Designed by Judy Niemeyer**

#CGRWAVE  
Made in USA



SEE A DEMO  
SCAN WITH ANY  
QR READER



Creative Grids® USA, Inc.  
400 W. Dussel Dr. Ste B,  
Maumee, OH 43537  
www.creativegridsUSA.com


Creative Grids® UK, Ltd.  
Unit 23A Pate Road  
Leicester Road Industrial Estate  
Melton Mowbray  
Leicestershire, LE13 0RG England  
www.creativegrids.com



## NON-SLIP 12" Wave Ruler


The 12" Wave Ruler cuts away excess fabric from any block with a finished width of 12" to add a wave. Use the ruler to also cut the sashing strips that will be sewn back into the block.

Assembly Example: Multiple Wave Blocks Sewn Together

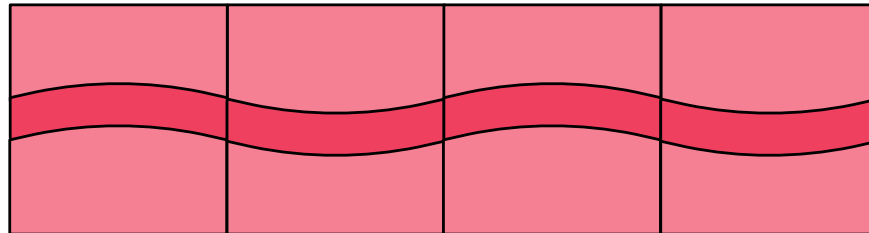


### Cutout Line 1

Center and place the 12" Wave Ruler Cutout 1 Line on one 12 1/2" edge of a stack of blocks. Cut away the fabric on the concave edge of the ruler. Or, cut both sides to create an hour-glass block with two concave edges.

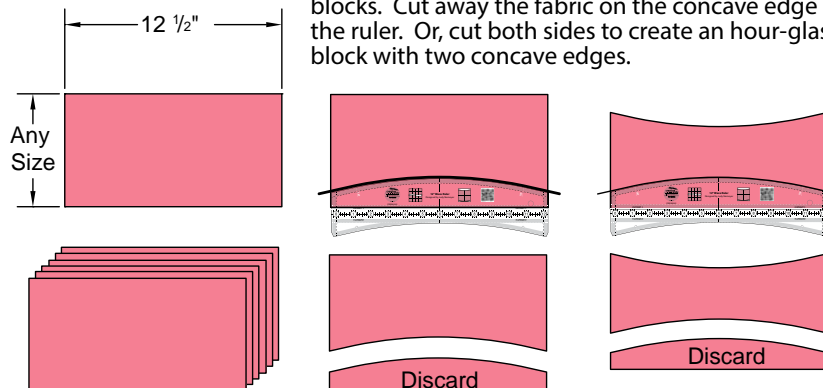

### Cutout Line 2


Center and place the 12" Wave Ruler Cutout 2 Line on one 12 1/2" edge of a stack of blocks. Cut away the fabric on the convex edge of the ruler to create a block that looks like a wave. Or, cut both sides to create a pear shaped block with two convex edges.

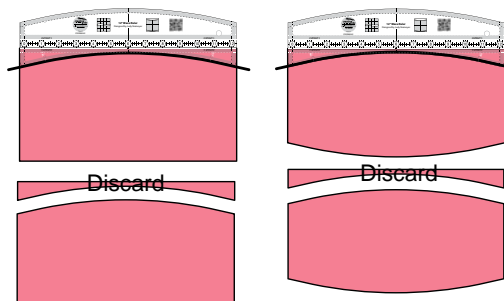

## Cutting The Wavy Sashing Strips

**Step 1:** Cut a 12 1/2" x Width of Fabric strip, then use the 12" Wave Ruler to cut the "waves" by cutting on both sides of the ruler.

**Step 2:** Stack the cut pieces and position the ruler on top. Trim the smart corners on each sashing piece for easy assembly.

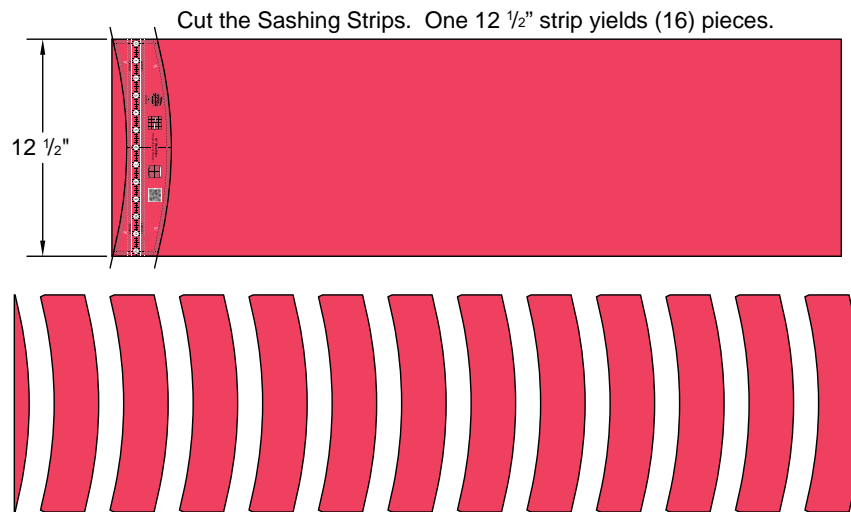


## Assembly Hints

These cut waves can be inserted to create a wavy border as shown. To see more options, visit [Quiltworx.com](http://Quiltworx.com), Notions, and find the 12" Wave Ruler. Sew the blocks together using your favorite curved piecing method. Then press the seams toward the sashing strip.

The ruler includes TRP lines (transition or registration points). Use these lines to mark the location of match points on the curved seams to sew a perfect seam! Mark them with a water soluble pen or baste at each location.

Assembly Example: Press Seams Towards Sashing Strip

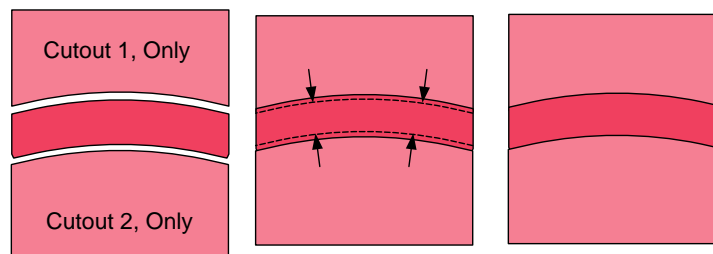

\*To explore a variety of layout options and test compatible blocks, visit [Quiltster.com](http://Quiltster.com)!

\*\*Charm Elements, which are paper-pieced blocks designed by [Quiltworx.com](http://Quiltworx.com) are available that fit the CGRWAVE ruler.

