


SSLD series

Heavy duty, Ultra long arm, Compound feed and walking foot,
Clutch driven puller feed, Double chain stitch machines

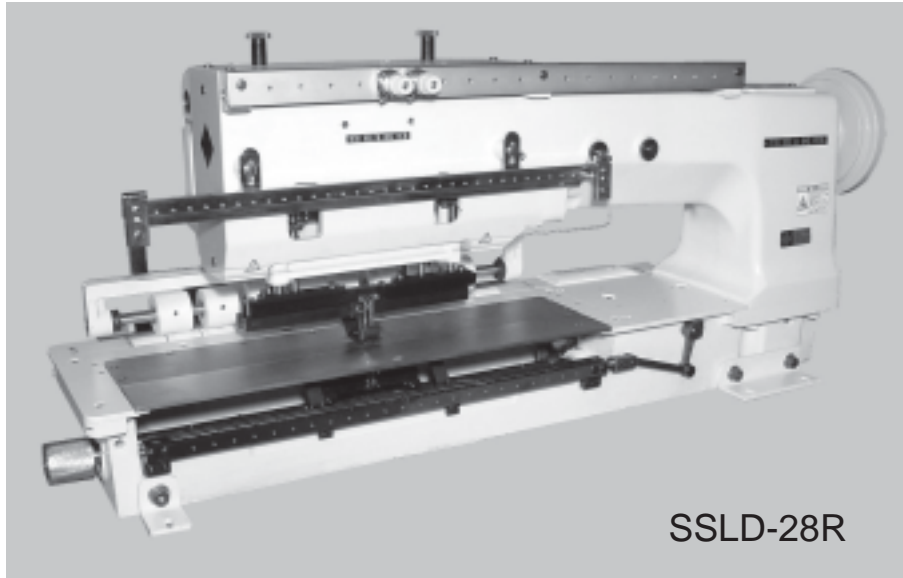

SSLD-28R

Variety



SSLD- 8R (2 ~ 9 needles)


Compound feed and walking foot, clutch driven puller feed



SSLD-1 8R (10 ~ 18 needles)

Compound feed and walking foot, clutch driven puller feed


* Min. distance between needles is 1/4"(6.4mm).

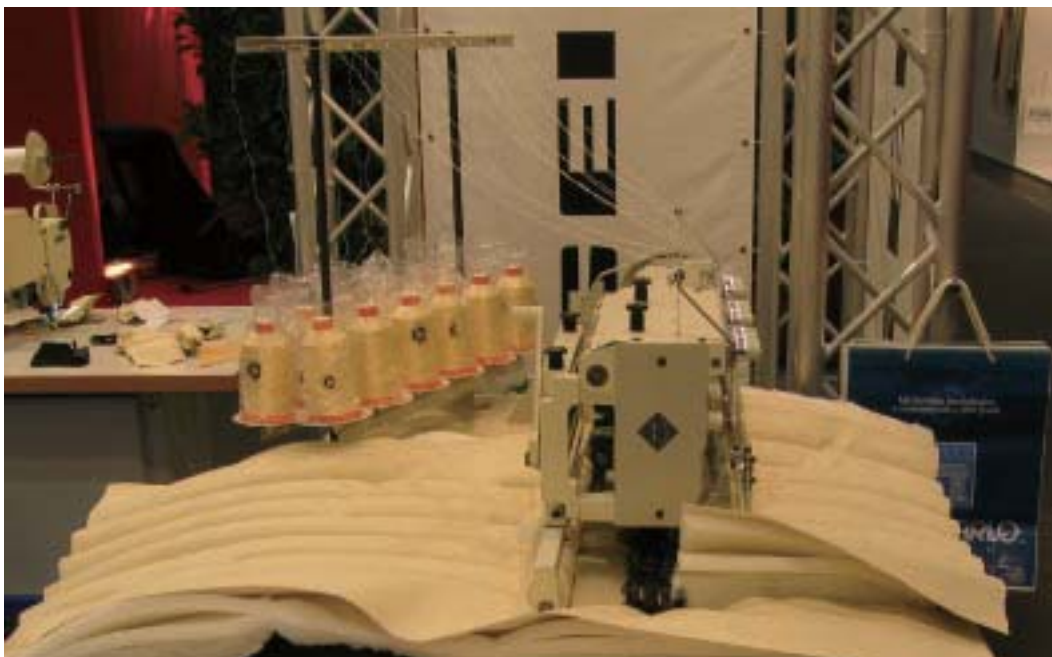

Applications

For sewing medium to heavy weight fabric, leather, canvas, denim, synthetics, and various coated and laminated materials.

Suitable for automobile upholstery, carpets, mattresses, etc.



Features

Ultra long arm, working space 20 inch (508 mm)

Compound feed and alternating presser foot mechanism ensures even feeding of heaviest and most slippery articles to be sewn

Heavy duty top and bottom puller ensures accurate and efficient feeding

No bobbin winding or changing (double chain stitch)

Automatic presser foot lift (FL) available

Wide range of needle gauges available. From 2 to 18 (Max. needle gauge width 18 inch / 460 mm)

* Please indicate us needle gauge size of each needle and overall length when ordering.

Specifications (SSLD-)

| Variety | SSLD-series |
|--------------------------------|---|
| Number of needle | 2 to 18 |
| Max. sewing speed | 1,200 s.p.m. |
| Max. stitch length | 23/64" (9 mm) |
| Clearance under presser foot | 19/32" (15 mm) |
| Needle bar stroke | 1-17/32" (39 mm) |
| Needle(standard) | DV x 59 (#22) / 62 x 59 (#140) |
| Thread | #8 (standard) |
| Thread take up lever | Needle bar type |
| Amount of lift of walking foot | 5/64"-15/64" standard 9/64" (2 - 5.8 mm) (standard 3.6 mm) |
| Lubrication | Semi-automatic type |
| Bed size | 38-37/64" x 7-31/64" (980 x 190 mm) |
| Working space | 20" x 4-51/64" (508 x 122 mm) |
| Motor | Clutch motor |

NOTE

(1) Speed depends on threads, materials and type of operation

(2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

<http://www.seiko-sewing.co.jp/>