


TH series

Single needle, Extra heavy duty, Large oscillating shuttle hook, Long arm, Flat bed, Lockstitch machines



Variety

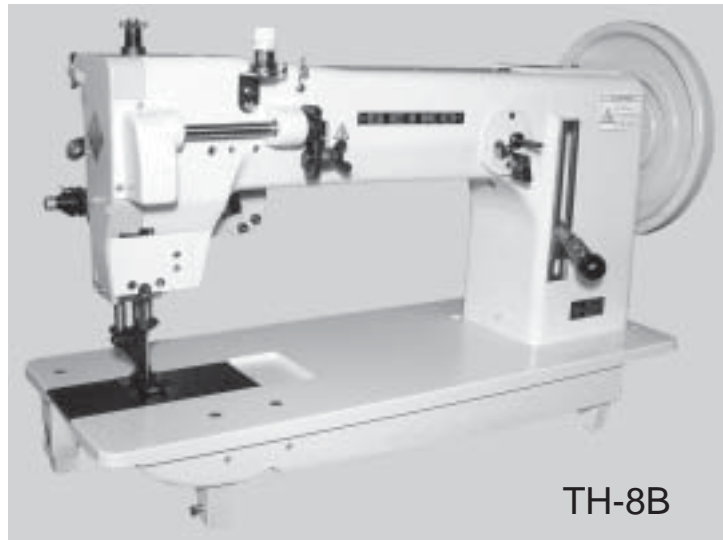

TH-6B

Drop feed, reverse stitch



TH-8B

Compound feed and walking foot, reverse stitch

Applications

For sewing heavy weight materials such as canvas, vinyl, leather, synthetics and various coated, laminated and rubberized fabrics.

Suitable for sewing tents, sails, harnesses, safety belts, parachutes, balloons, industrial bags, book bindings, suitcases and other extra heavy weight materials.



Features

- Large oscillating shuttle hook.
- Extra long arm. [working space 15-3/4"(400 mm)]
- Reverse stitching.
- Built-in bobbin winder.
- Extra high presser lift for sewing extra heavy materials.
- Cylinder bed version available. (CH series)
- Roller presser foot [1-29/64"(37 mm) dia.] available. (TH-6B only)

Specifications (TH-)

Variety	6B	8B
Number of needle	Single needle	
Max. sewing speed	800(s.p.m.)	
Max. stitch length	15/32" (12 mm)	
Clearance under presser foot	by knee	63/64" (25 mm)
	by hand	25/64" (10 mm)
Needle bar stroke	2" (51 mm)	2-13/64" (56 mm)
Needle(standard)	DDx1 (#25) , 328 (#200)	DYx3 (#25) , 794 (#200)
Thread	#5 (standard)	
Hook	Large oscillating shuttle hook	
Amount of lift of walking foot		1/8"-15/64" standard 5/32" (3 - 6 mm) (standard 4 mm)
Thread take up lever	Cam type	
Lubrication	Hand type	
Bed size	25-63/64"x 9-61/64" (660 x 253 mm)	
Working space	15-3/4"x 7" (400 x 180 mm)	
Motor	Clutch motor	
Net weight(Head only)	75Kg	

NOTE

- (1) Speed depends on threads, materials and type of operation
- (2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi
Chiba Prefecture, 273-0018, Japan

Phone : +81-47-420-3561 (Overseas dept.)

Fax : +81-47-420-3560

E-mail : export@seiko-sewing.co.jp

<http://www.seiko-sewing.co.jp/>